


Application and Features

Push in to Latch, Push in again to Unlatch

Recommended Part Mating:

Specifications

Contact Material	Copper Alloy
Contact Plating	3u~30u Gold on Contact, 100u~200u Tin on Solder Tail
Contact Resistance	100 m ohm max
Current Rating	0.5 Amps
Dielectric Withstanding	500 VAC
Environmental	RoHS Compliant
Insulator Material	L.P.C., UL 94V-0
Insulator Resistance	1000 Megohm min
Mating Cycles	10000 Cycles
Operating Temperature	-25° ~ +85° C
Shell Material	Stainless Steel
Voltage Rating	100V Max

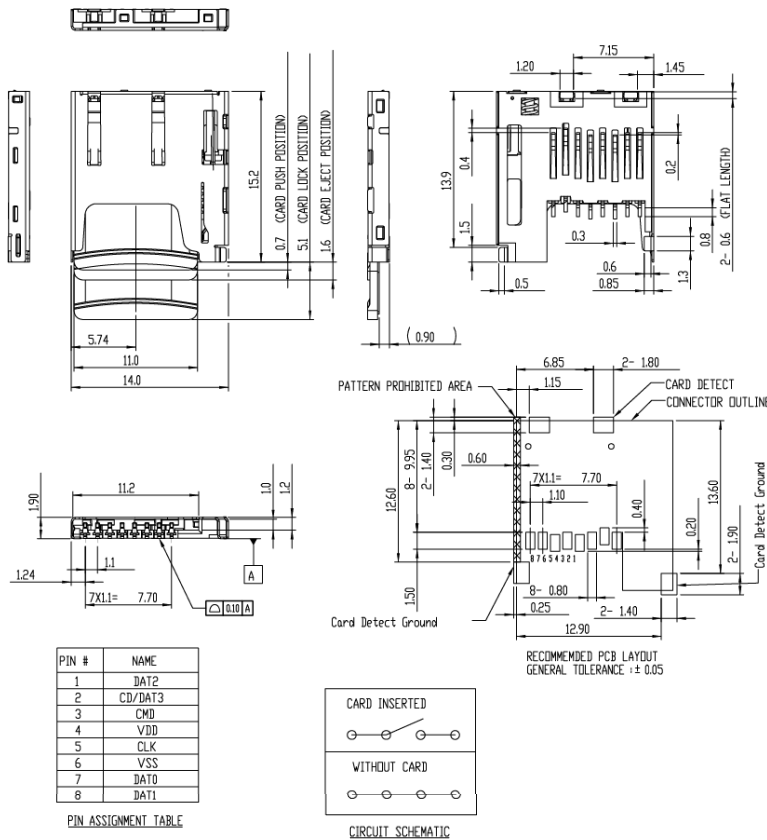

How to Order

unit:mm
 Please replace "X" with appropriate coding listed in the tables below.

CTSD **XX** P **X** TB380 **XXX**
 1 2 3 4 5

Item	Description	Options
1	Number of Contacts	08
2	Contact Plating	15u" Gold=VC
3	Packaging Option	Tape&Reel=C
4	Color	Black=3
5	Environment Type	High Temp RoHS Compliant

Products specifications are subject to be changed without notice.
 Please contact your local Aptos Technology sales office for further confirmation.