


Application and Features

Multiple Height Options
P.C.B. Holders Included

Recommended Part Mating: MPES-BH


Specifications

Contact Material	Brass
Contact Plating	Gold Plating
Contact Resistance	30 m ohms max
Current Rating	1 Amp
Dielectric Withstanding	AC 500 V
Environmental	RoHS Compliant
Insulator Material	High Temperature Thermoplastic, UL 94V-0
Insulator Resistance	1000 Megohms min
Max Processing Temp	260°C for 5 sec.
Operating Temperature	-55° ~ +105° C

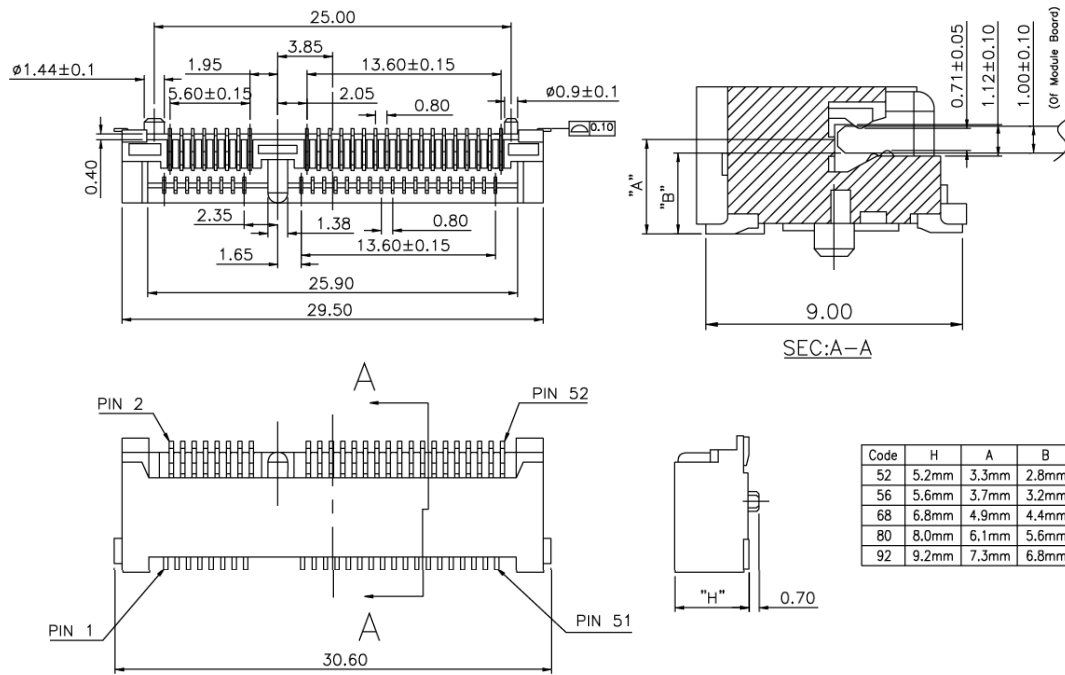

How to Order

Please replace "X" with appropriate coding listed in the tables below.



Item	Description	Options
1	Height Type	4.0mm=40, 5.2mm=52, 5.6mm=56, 6.8mm=68, 8.0mm=80, 9.2mm=92
2	Contact Plating	Gold Flash=VB, Gold 5u"=VD, Gold 15u"=VF
3	Color	Black=0, Natural=1
4	Environment Type	High Temp RoHS Compliant=FG

Products specifications are subject to be changed without notice.
Please contact your local Aptos Technology sales office for further confirmation.