


Unit: mm

Part Number	Dim 'A'
DVI-24VABNW11	* 2.75mm
DVI-24VABNW113	* 3.30mm

**SPECIFICATIONS**

Current Rating: 1.5 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20 m ohms max.  
 Dielectric withstanding: DC 500V RMS ±50V, 60 Hz  
 Shell Resistance: 50 Milliohms max.  
 Initial; 50 Milliohms max  
 Operating Temperature: -20°C~+85°C  
 Contact Material: Brass  
 Contact Plating: Gold over Nickel on Contact area,  
 Tin Plating on Terminal  
 Harpoon Material: Brass  
 Harpoon Plating: Tin Plating over Nickel  
 Body & Latch Material: Nylon66+33% G.F., UL 94V-0  
 Color: White  
 Mating Force: 4.5 KG Max @ 25 mm/minute  
 Unmating Force: 1.0 KG Min AND 4.0 KG Max  
 Durability: 100 Mating Cycles

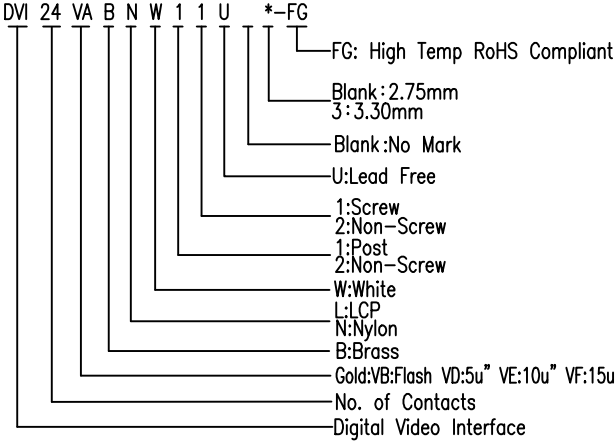

APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.25
XX. ± X	.XXX ± 0.20
X. ± X	X.' ± 3'
.X ± 0.38	.X' ± X'



REV.	H	DRAWN	03/02/05
DATE	03/02/05	CHECKED	
SCALE	As shown	APPROVED	
UNIT	mm		

DVI Series	
DVI Female 24 Position R/A	
PRODUCT NO.	DVI-24VABNW11 *-FG
FILE NAME:	DVI-24VABNW11U-FG LF APD.DWG

REV.	ECN.NO.	DATE
A	RELEASED	2001/06/18
G	Modify Harpoon Plating	07/23/04
H	Add Lead Free Plating	03/01/05