

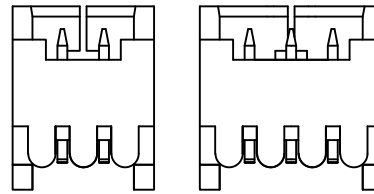
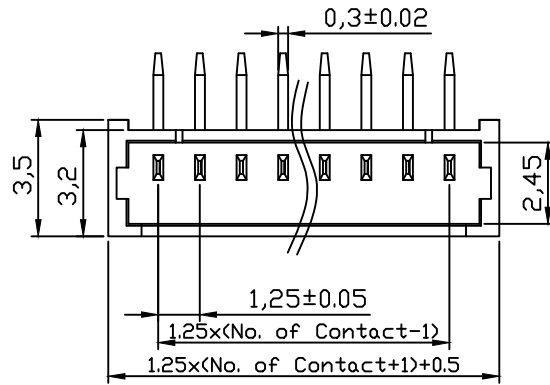


SPECIFICATIONS


Voltage Rating: 100V AC/DC
 Current Rating: 1 Amp
 Insulator Resistance: 100 Megaohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric withstanding: AC 250V
 Operating Temperature: -25°C~+85°C
 Contact Material: Brass
 Insulator Material: Nylon 46, UL 94V-0
 Finish: Tin Plating



2 PIN 3 PIN

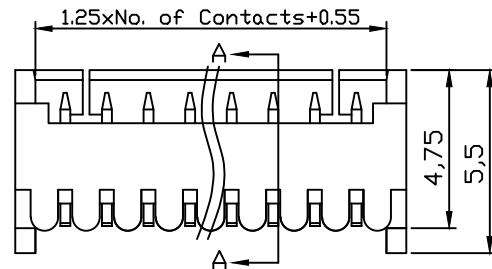

SECTION A-A

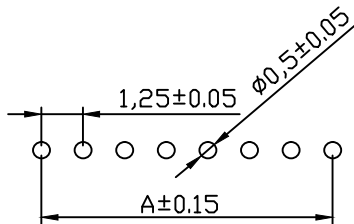

P.C.B. LAYOUT

FWD-XX-XX-FG
 Number of Contacts Contact Plating High Temp RoHS Compliant (Nylon-6T or Greater)

Definition	Code
⊙ Tin plating:	VA

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± X	X.' ± 3'
.X ± 0.30	.X' ± X'



REV. A	DRAWN	03/30/09	FWD Series
DATE 03/30/09	CHECKED		1.25mm Wire to Board Wafer - R/A
SCALE 1:1	APPROVED		PRODUCT NO. FWD-XX-XX-FG
UNIT mm		SIZE A4	FILE NAME: FWD LF APD.DWG