


Recommended P.C.Board Hole Layout

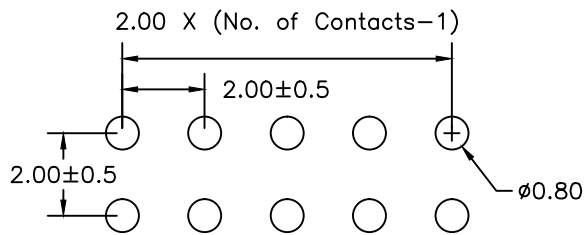

APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

### SPECIFICATIONS

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms Min.
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40° ~ +105°C
- Contact Material: Brass
- Contact Resistance: 20 Megohms Max
- Insulator Material: Polyester, UL 94V-0
  - ☉ Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plated
  - ☉ Standard: Gold Flash all over
- Duplex Plating: Gold plated on contact area, Tin on solder area

LF-XX-XX-A/C/B-FG  
 Number of Contacts | Contact Plating | High Temp RoHS Compliant  
 \*Standard 040/xxx/028 Other Lengths Avail.

Definition	Code
☉ Tin plated:	VA
☉ Gold plated:	
flash VB 10μ"	VE
3μ" VC 15μ"	VF
5μ" VD 30μ"	VJ
☉ Duplex plating:	
flash VK 10μ"	VP
3μ" VL 15μ"	VN
5μ" VM 30μ"	VU
☉ Standard:	VB

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	X. ± X
.X ± X	.X ± X
REV. A	DRAWN
DATE 03/31/08	CHECKED
SCALE 5:1	APPROVED
UNIT mm	



03/31/08	LF Series
	2.00mm Board Stacker - Dual
	PRODUCT NO. LF-XX-XX-A/C/B-FG
	FILE NAME: LF LF APD.DWG