

PQEZ-XX-XX-094/023-FG

Number of Contacts

High Temp RoHS Compliant

Pin Length mm A/B

A=9.35mm, B=2.30mm - 094/023

A=10.9mm, B=2.70mm - 109/027





A=11.40mm, B=2.20mm - 114/022

Contact Plating

Definition	Code		
◎ Tin plated:	VA		
◎ Gold plated:			
flash VB	10μ"	VE	
3μ" VC	15μ"	VF	
5μ" VD	30μ"	VJ	
◎Duplex plating:			
flash VK	15μ"	VP	
3μ" VL	10μ"	VN	
5μ" VM	30μ"	VU	
◎Standard:	VB		

SPECIFICATIONS

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 500V
- Operating Temperature: -40°C~+105°C
- Max. Processing Temp: 230° for 30~60 Seconds
(260° for 10 Seconds)
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- ◎Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plating
- ◎Standard: Duplex Plated
- Duplex Plating: Gold Plated on contact area
Tin Plated on solder area

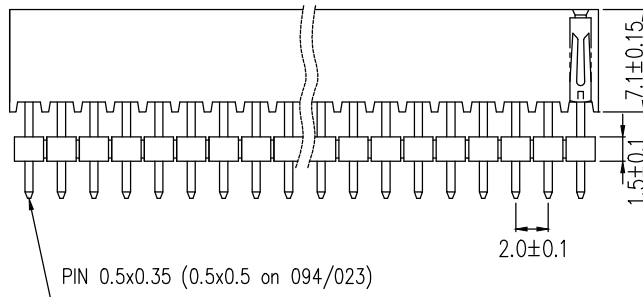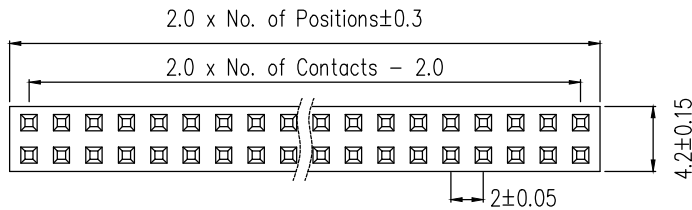

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± X	X.' ± 5"
.X ± 0.35	.X' ± X"

AP

APTOS
TECHNOLOGY

REV. A	DRAWN	01/14/09	PQEZ Series 2.00 mm Socket - Elevated
DATE 01/14/09	CHECKED		
SCALE None	APPROVED		PRODUCT NO. PQEZ-XX-XX-094/023-FG
UNIT mm	⌀	SIZE A4	FILE NAME: PQEZ LF APD.DWG