



SPECIFICATION :

1. Electrical Char.



- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.


- Housing : PBT Glass Filled (UL 94V-0)
- Soldering Temp.: 235 Deg C
- NYLON (UL 94V-0)
- Soldering Temp.: 260 Deg C
- Color : Black Color
- Contact Wires : 0.45mm Dia. Phosphor bronze
- Gold Plating Over Nickel
- Temperature Range : - 40 /+85 Deg C
- Durability : 500 Mating cycles Min.

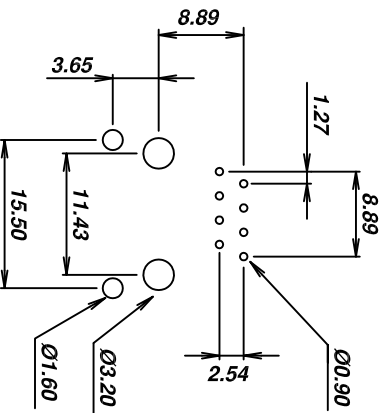

PCB LAYOUT
(Top View)

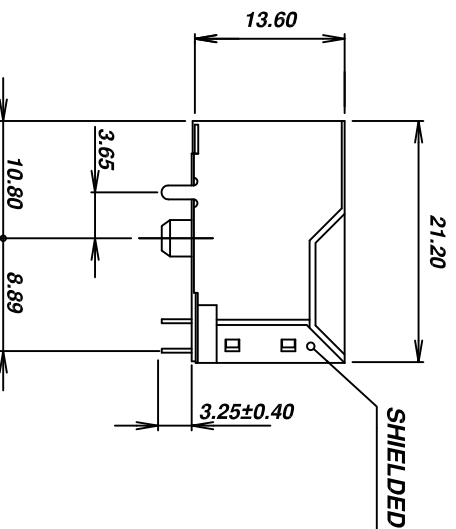

AMJ-008SH8F-XX-A2-FG

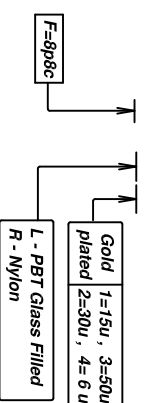

AP APTOS TECHNOLOGY

TITLE

RJ45 SIDE ENTRY SHIELDED PCB JACK

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

AJ-008SH-8-F-XX-A2-N1

SCALE SIZE DWG. NO. 9638S SERIES

DWG. NO. AMJ-008SH8F-A2FG	NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
	THIRD ANGLE PROJECTION	LINEAR ANGLE +0°30'	00±0.1 000±0.05 0000±0.02	00±0.25 000±0.13 0000±0.05	Steven John APP'D Billy	JUL-15 '10 JUL-15 '10 JUL-15 '10
			RADIL	+0.45 -0.15		