



SPECIFICATIONS




- 1.Center Contact: Phosphor Bronze, Gold Plating
- 2.Body: Zinc Alloy, Nickel Plating
- 3&4.Insulator: PE-606
- 5.Mounting Post: Brass, Tin Plating
- 6.Solder Tail: Copper Wire, Tin Plating



RECOMMEND PC BOARD LAYOUT
WITHOUT MOUNTING POSTS



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5mm

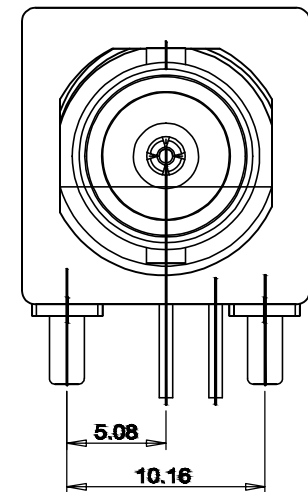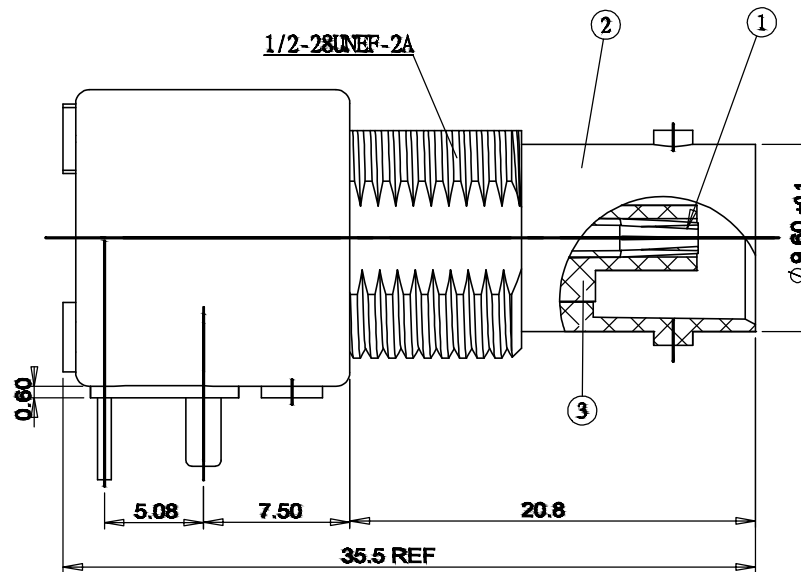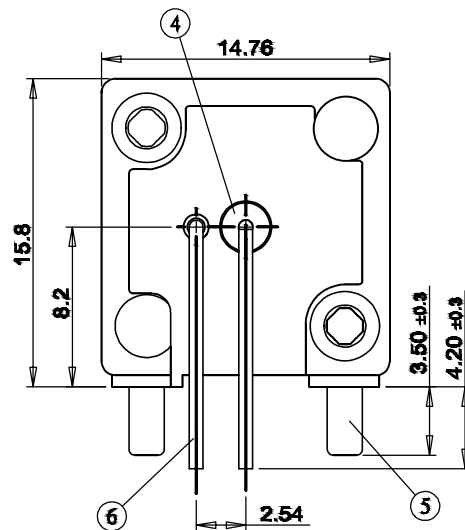

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	±	X	.XX ± 0.10
XX.	±	X	.XXX ± X
X.	±	0.50	X' ± 1"
.X	±	0.30	.X' ± X"
REV.	A	DRAWN	09/15/09
DATE	11/13/2017	CHECKED	
SCALE	As shown	APPROVED	
UNIT	mm		

APTOS TECHNOLOGY

BC83 Series

75ohms R/A PCB Mount Jack, Metal Body

PRODUCT NO. BC830401C-FG

FILE NAME: BC830401C-FG.dwg

SIZE A4