
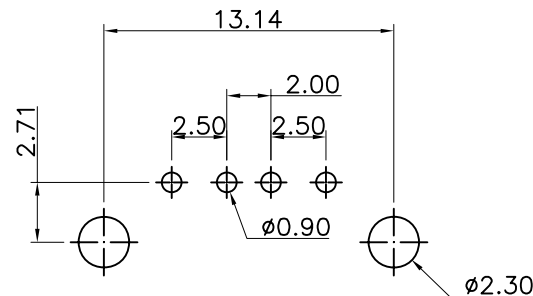


Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min.
Contact Resistance: 30 m ohms max.
Dielectric withstanding: AC 500V
Operating Temperature: -55°C~+105°C
Contact Material: Copper Alloy
Shell Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
◎Standard: P.B.T.
Finish: Gold Plated on contact area
Tin Plated on solder area
Mating Force: 4.0 KG Max 4kg.
Unmating Force: 0.7 KG Max 7kg.

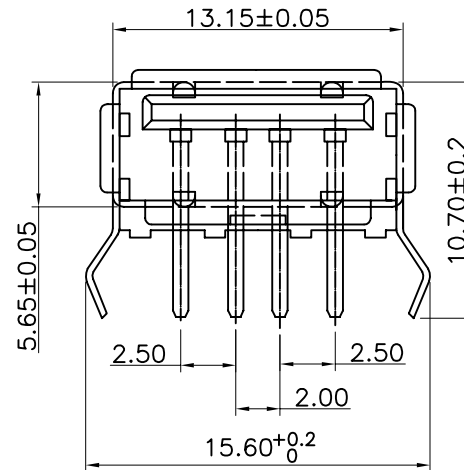

TOP VIEW
PCB LAYOUT RECOMMENDED

BPOA-101-4-XXX-X-G
 Color: A= Black
 D= White

Definition	Code
Gold Flash	V02
Gold 15 μ "	V55
Gold 30 μ	V58

APTOS Technology CONFIDENTIAL

This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX. ± X	.XX ± 0.15		
XX. ± X	.XXX ± X		
X. ± X	X.* ± 3"		
.X ± 0.25	.X' ± X'		
REV. 1	DRAWN	05/16/06	BPOA Series Type A USB – 90° Mount PRODUCT NO. BPOA-101-4-XX-X-G FILE NAME: BPOA 101 LF APD.DWG
DATE 05/16/06	CHECKED		
SCALE 1:1	APPROVED		
UNIT mm		SIZE A4	