
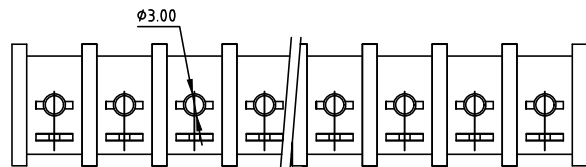

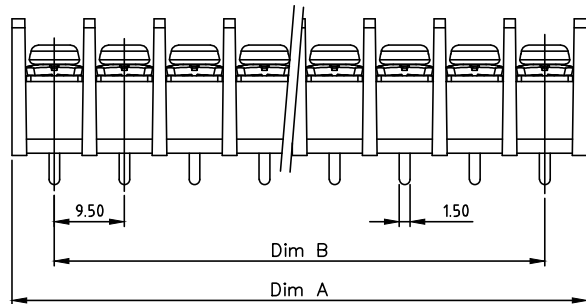
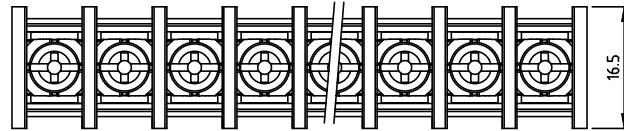


## SPECIFICATIONS

Voltage Rating: 300VAC  
 Withstanding Voltage: AC 2000V Min  
 Current Rating: 30 Amps  
 Insulator Resistance: 1000ohms or More at DC 500V  
 Operating Temperature: -40°C to +115°C  
 Torque: 8.8 Lb-In  
 Wire Range: 10-22 AWG  
 Insulator Material: Thermoplastic, UL 94V-0, Black  
 Terminal: Brass, 0.8t, Tin Plated  
 Terminal Screw: Steel, M3.5  
 Approval: 




Dimension A & B  
 DIM A  $N \times 9.5 + 2.0$   
 DIM B  $(N-1) \times 9.5$   
 N=Number of contacts

Dimension A & B	Tolerance
>6~30	±0.30
>30~120	±0.40
>120~400	±0.60

### BTS-514-xx x-FG


NO. OF POLES ———— FG: RoHS Compliant (Lead <4% in Copper Alloy)  
 2 POLES  
 3 POLES  
 :  
 30 POLES  
 Terminal & Screw Plating  
 0: Terminal & Screw: Gold Flash  
 1: Terminal: Gold Flash, Screw: Zinc  
 2: Terminal: Tin, Screw: Gold Flash  
 3: Terminal: Tin, Screw: Zinc  
 4: Terminal: Tin, Screw: Tin

**APTOS Technology CONFIDENTIAL**  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

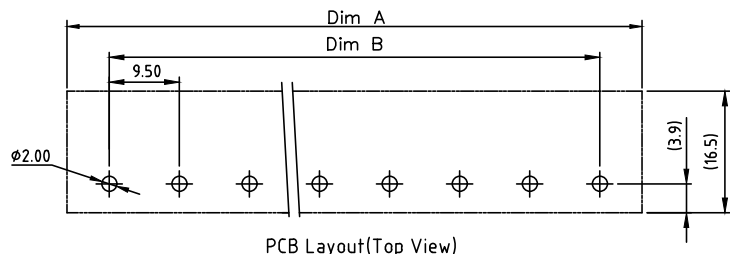

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X.' ± 1"
.X ± 0.30	.X' ± X"

REV. A	DRAWN JG	01/11/18
DATE 01/11/18	CHECKED	
SCALE As shown	APPROVED	
UNIT mm		SIZE A4



**BTS Series**  
 Barrier Terminal Strip 9.5mm  
 PRODUCT NO. BTS-514-XXX-FG  
 FILE NAME: BTS-514-XXX-FG.dwg