


WIRING DIAGRAM

X-Code(P1) X-Code(P2)

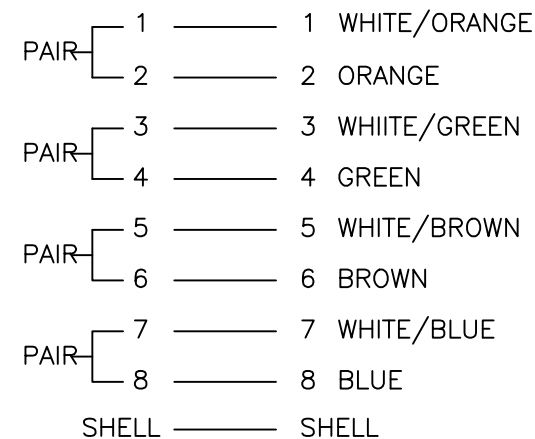

NOTES

1.PART DESCRIPTION:

ITEM	PART	DESCRIPTION
1	CONNECTOR	M12 X-Code Male Connector CONTACT GOLD PLATED 30u" OVER 50~200u" NICKEL
2	CABLE	10G CAT 6A. 26 AWG 4PAIRS
3	SHIELDED	FTP Aluminium/Polyester Shield
4	JACKET	MATERIAL PVC

2.PART NO.

SERIES NO. _____
 WE=Waterproof Connection
 CONNECTOR OPTION _____
 05=X-Code/X-Code
 PIN _____
 08=8PIN
 CODE _____
 E=X-Code

GREEN OPTION.
 FG=RoHS
 LENGTH.
 EX.60C=60CM, 3M5=3.5M
 1M0=1M, 2M0=2M
 AWG.
 D=26AWG
 IP.
 A=67

For SIP

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG. ± 5°
 0. ± 0.50
 .0 ± 0.30
 .00 ± 0.20

AP APTOS
 TECHNOLOGY

SCALE: AS SHOWN UNIT: mm

DRAWN JG 01/02/2018

CHECKED

APPROVED

DRAWING NAME:
 M12 X-Code To X-Code Cable

PRODUCT NO. CBLWE-0508EADXXX-FG

FILE NAME: CBLWE-0508EADXXX-FG.dwg

REV.	DESCRIPTION	DATE	SIZE	REV.	DATE
1			A4	B	