

SPECIFICATION


ELECTRICAL
 Current rating: 4 Amps max.
 Voltage rating: 250 V AC/DC MAX
 Temperature range: -20°C TO +75°C

PART NO.

CBLWG 05 04 D A D XXX FG
 SERIES NO. _____
 WG=Waterproof Connection
 CONNECTOR OPTION _____
 5=M12 180° Male/M12 180° Male
 PIN: _____
 04=4PIN
 CODE _____
 D=D-Code

GREEN OPTION.
 FG=RoHS
 LENGTH.
 EX.60C=60CM, 3M5=3.5M
 1M0=1M, 2M0=2M
 AWG.
 D=26AWG
 IP. A=67

WIRING DIAGRAM

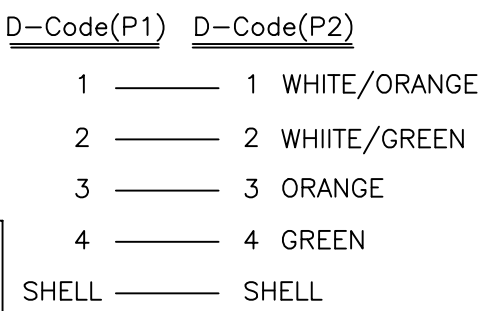

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

ITEM	PART	DESCRIPTION
1	CONNECTOR	M12 D-Code Male Connector CONTACT GOLD PLATED 3u" OVER 50~100u" NICKEL
2	M12 Nut	BRASS, 80u" NICKEL min.
3	Middle Holder	BRASS, 80u" NICKEL min.
4	Crimp □-Ring	Silicon rubber 60°
5	Rubber Boot	Silicon rubber 70°
6	CABLE	CAT.5E FTP LOW SMOKE ZERO HALOGEN, 4 PR 26 AWG SHIELDED, PVC JACKET OD:5.8 mm

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	± 5°
0.	± 0.50
.0	± 0.30
.00	± 0.20



REV.	DESCRIPTION	DATE	For SIP	SCALE: AS SHOWN	UNIT: mm	AP APTOS TECHNOLOGY
				DRAWN JG	01/04/2018	DRAWING NAME: M12 D-Code To D-Code Cable
				CHECKED		PRODUCT NO. CBLWG-0504DADXXX-FG
				APPROVED		FILE NAME: CBLWG-0504DADXXX-FG.dwg
				SIZE A4	REV. A	