

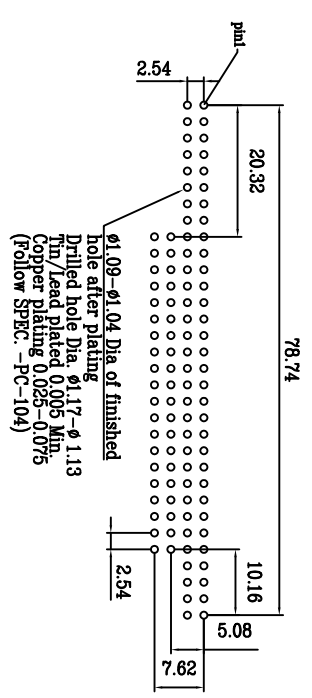
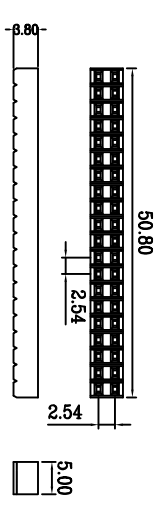
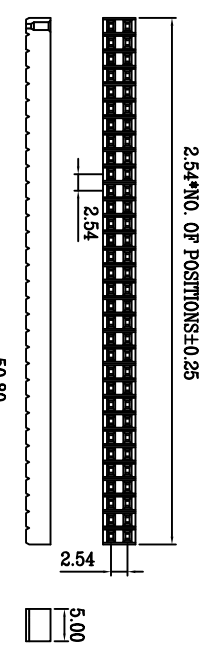


SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -25 °C ~ +85 °C

MATERIAL
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

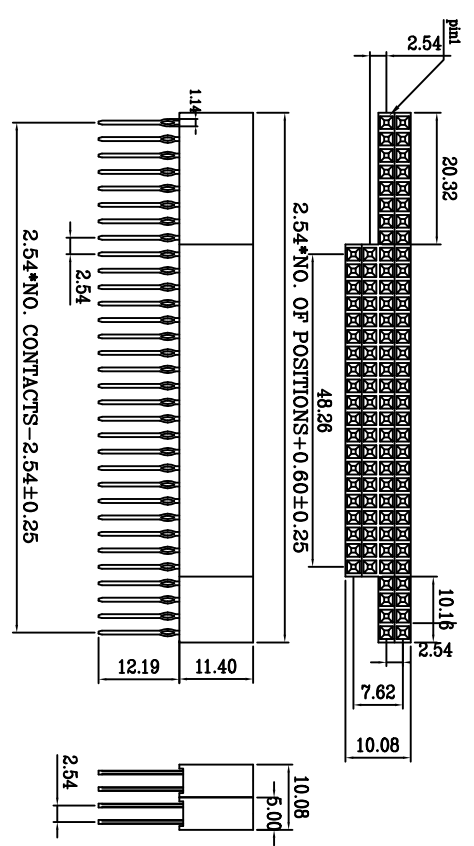

Recommend P.C.B. Layout
 TOP View

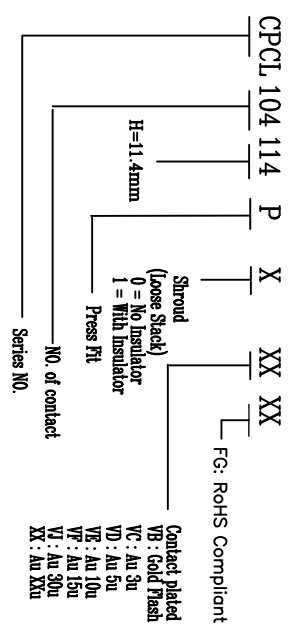

Contact plated
 VB: Gold Flush
 VD: Au 50
 VE: Au 50
 VF: Au 10u
 VG: Au 15u
 VH: Au 30u
 VI: Au 30u

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX	±	X	.XX ± 0.10
XX	±	X	.XXX ± X
X	±	0.50	X' ± 1'
X	±	0.30	.X' ± X'

REV.	A	DRAWN		DATE	09/15/09
DATE		CHECKED		APPROVED	
SCALE		UNIT	mm	SIZE	A4
PRODUCT NO.			PC104 Press-Fit, Stacking	FILE NAME:	CPCL-104 LP APD.DWG

APTOS
 TECHNOLOGY

