


Recommend P.C.B. Layout
TOP View

SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -25 °C ~ +85 °C

MATERIAL
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

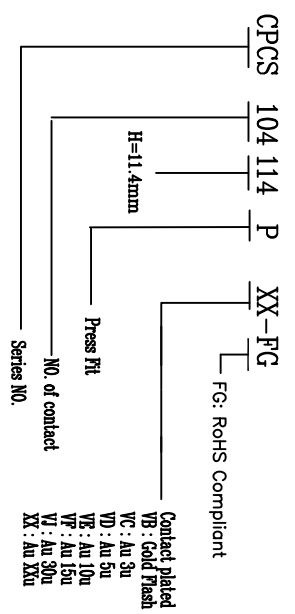

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		.XX ± 0.10	
XXX.	± X	.XXX	± X
XX.	± X	X.	± 1'
X.	± 0.50	X'	± X'
.X	± 0.30	X''	± X''
REV.	A	DRAWN	
DATE		CHECKED	
SCALE		APPROVED	
UNIT	MM		
APR 15/09		PC104 Press-Fit, Non-Stack	
APR 15/09		PRODUCT NO. CPCS10414XX-FG	
A4		FILE NAME: CPCS-104 LP APD.DWG	

APTOS TECHNOLOGY

PC104 Press-Fit, Non-Stack

PRODUCT NO. CPCS10414XX-FG
 FILE NAME: CPCS-104 LP APD.DWG