

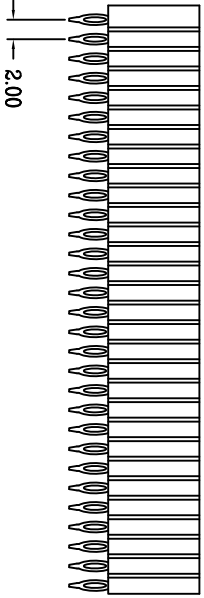


SPECIFICATIONS
 CURRENT RATING: 2 AMP MAX.
 INSULATION RESISTANCE: 1000M OHMS MIN.
 DIELECTRIC WITHSTANDING: 1000V AC/DC
 CONTACT RESISTANCE: 30m OHMS MAX.
 OPERATING TEMPERATURE: -25°C ~ +85°C
MATERIALS
 CONTACT MATERIAL: PHOSPHOR BRONZE
 INSULATION MATERIAL: NYLON 9T UL 94V-0

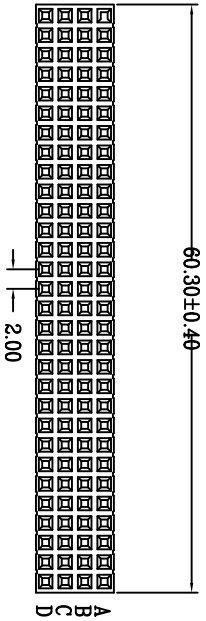

CPQS 120 935 P VB-FG


Contact No. _____

H=9.35mm

Contact plating

FG=ROHS Compliant

Press Fit

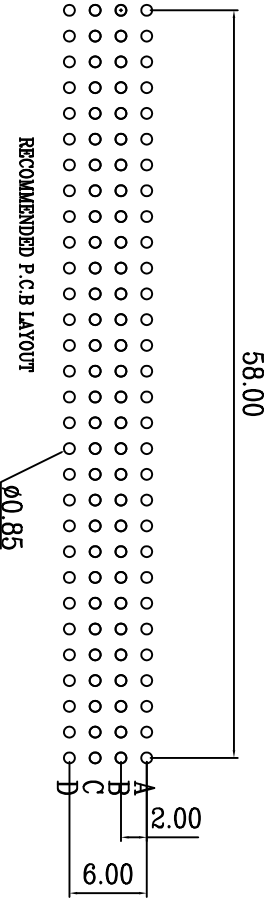

Definition	Code
Gold flash	VB
10u"	VE
15u"	VF
30u"	VJ

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X. ± 1"
.X ± 0.30	.X ± X"

REV. A	DRAWN	.X ± X"
DATE 09/15/09	CHECKED	
SCALE As shown	APPROVED	
UNIT mm		

APTOS TECHNOLOGY

CPQS Series

PC104 Plus Press-Fit Non Stacking
 PRODUCT NO. CPCS120935PVB-FG
 FILE NAME: CPCS120 LF APD.DWG

