
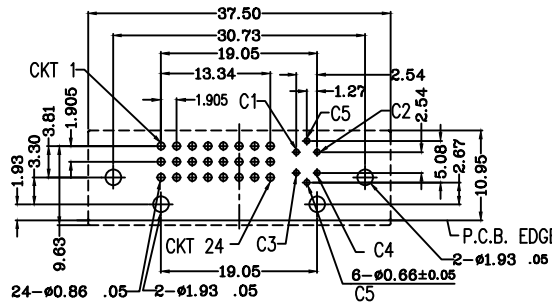
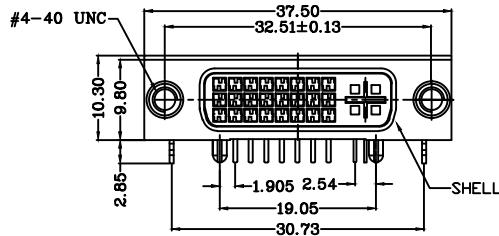

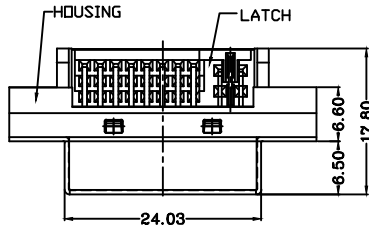


Unit: mm



Part Number	Dim 'A'
DVI-29ABNW11-*	2.75mm
DVI-29ABNW113-*	3.30mm

SPECIFICATIONS


Current Rating: 1.5 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric withstanding: DC 500V RMS $\pm 50V$, 60 Hz
 Shell Resistance: 50 Milliohms max.
 Initial; 50 Milliohms max
 Operating Temperature: $-20^{\circ}C \sim +85^{\circ}C$
 Contact Material: Brass
 Contact Plating: Gold over Nickel on Contact area,
 Tin Plating on Terminal
 Harpoon Material: Brass
 Harpoon Plating: Tin Plating over Nickel
 Body & Latch Material: Nylon66+33% G.F., UL 94V-0
 Color: White
 Mating Force: 4.5 KG Max @ 25 mm/minute
 Unmating Force: 1.0 KG Min AND 4.0 KG Max
 Durability: 100 Mating Cycles



P.C.B. Layout

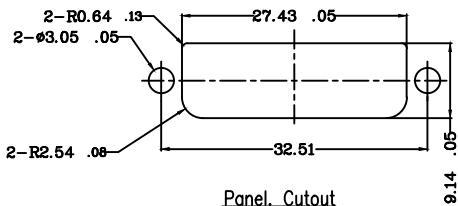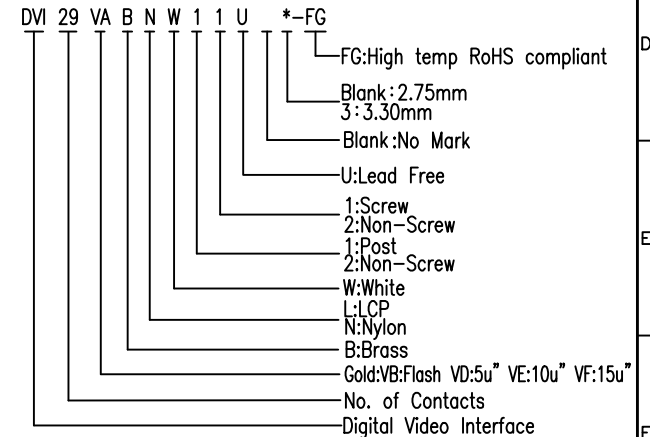

Panel Cutout



SCREW

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

REV.	ECN.NO.	DATE
A	RELEASED	2001/06/18
G	Modify Harpoon Plating	07/23/04
H	Add Lead Free Plating	03/01/05

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.25
XX. ± X	.XXX ± 0.20
X. ± X	X' ± 3'
.X ± 0.38	.X' ± X'
REV. H	DRAWN
DATE 03/02/05	CHECKED
SCALE As shown	APPROVED
UNIT mm	SIZE A4

APTOS TECHNOLOGY

DVI Series
 DVI Female 29 Position R/A
 PRODUCT NO. DVI-29VABNW11U*-FG
 FILE NAME: DVI-29VABNW11U*-FG LF_APD.DWG