


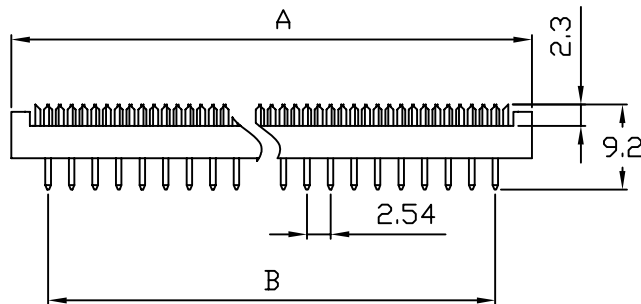

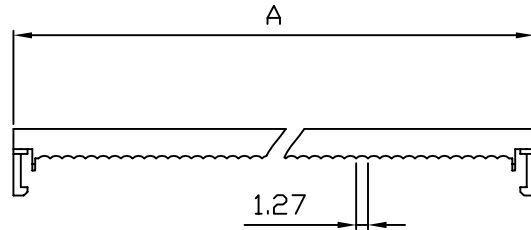



Table A

POSITION	A	B
06P	12.94	5.08
08P	15.48	07.62
10P	18.10	10.16
12P	20.51	12.70
14P	23.05	15.24
16P	25.64	17.78
18P	28.15	20.32
20P	30.78	22.86
24P	35.86	27.94
28P	38.40	30.48
28P	40.60	33.02
30P	43.50	35.56
34P	48.58	40.64
40P	56.20	48.26
50P	69.00	60.96
60P	81.75	73.66
64P	86.83	78.74

SPECIFICATIONS

- Current Rating: 1 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 500V
- Operating Temperature: -55°C~+105°C
- Contact Material: Phosphor Bronze or Brass
- Insulator Material: Polyester, UL 94V-0
- ◎Standard: P.B.T.
- Finish: Gold Plating
- ◎Standard: Selective Gold Flash over Nickel

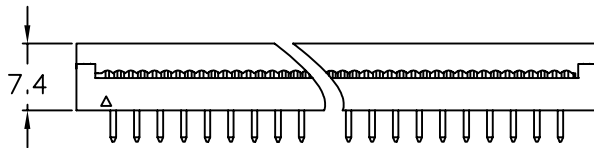

FPN-XX-X-033-G
 Number of Contacts (See Table A) | G: RoHS Compliant
 Contact Plating | Pin Length: 3.3 mm

Definition	Code
◎Selective Gold: flash	VS
VB 10μ"	VE
VC 15μ"	VF
VD 30μ"	VJ
◎Standard:	VS

REV.	DESCRIPTION	DATE
C	P/N Correction	02/04/07
B	ECN-0506102(Emily)	06/10/05
A	DRA-0304043(Rita)	04/16/03

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± 0.20	.X' ± X'
.X ± 0.20	.X' ± X'

REV.	DRAWN	DATE
B		04/16/03
DATE	CHECKED	
06/23/05		
SCALE	APPROVED	
As shown		
UNIT		
mm		



FPN Series
 2.54 mm I.D.C. Transition Plug
 PRODUCT NO. FPN-XX-X-033-*
 FILE NAME: FPN LF APD.DWG