

SPECIFICATIONS




Current Rating: 1 Amps
 Insulator Resistance: 3000 Megohms min.
 Contact Resistance: 30 m ohms max.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°C~+105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T. Glass Reinforced
 Finish: Gold and Tin Plating

FTN-XX-XX-030-G




Number of Contacts: XX
 Contact Plating: XX
 Pin Length: 3.0mm
 G: RoHS Compliant

Definition	Code
◎ Tin plated	VA
◎ Gold Flash	VB
5μ"	VD
15μ"	VF
10μ"	VE
30μ"	VJ

PIN Q'TY	A	B
08	12.20	6.00
10	14.20	8.00
12	16.20	10.00
14	18.20	12.00
16	20.20	14.00
20	24.20	18.00
22	26.20	20.00
24	28.20	22.00
26	30.20	24.00
30	34.20	28.00
34	38.20	32.00
40	44.20	38.00
44	48.20	42.00
50	54.20	48.00
68	72.20	66.00

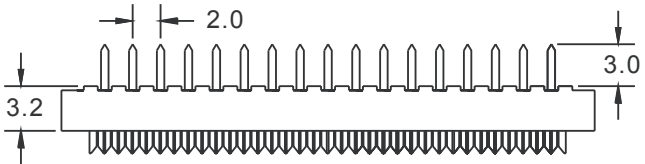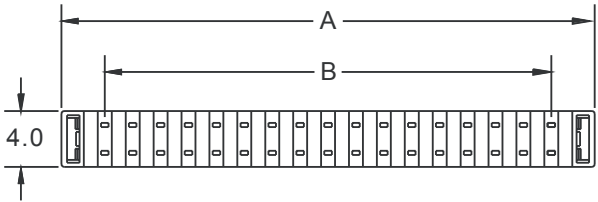

(5.2) TERMINATED HEIGHT



RECOMMENDED P.C.B LAYOUT

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.25
XX. ± X	.XXX ± 0.13
X. ± X	X' ± 5'
.X ± 0.38	.X' ± 2'
REV. A	DRAWN
DATE 03/27/08	CHECKED
SCALE 2:1	APPROVED
UNIT mm	SIZE A4



03/27/08
 FTN Series
 2.00 mm Transition Plug
 PRODUCT NO. FTN-XX-XX-030-G
 FILE NAME: FTN LF APD.DWG