

**SPECIFICATIONS**


- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms Min.
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40° ~ +105°C
- Contact Material: Brass
- Insulator Material: Polyester, UL 94V-0
- Finish: Tin, Gold or Duplex Plated
- Duplex Plating: Gold plated on contact area, Tin on solder area

LE-XX-XX-A/C/B-FG

Number of Contacts | Contact Plating | FG: High Temp RoHS Compliant  
 \*Standard 040/xxx/028 Other Lengths Avail.

Definition	Code		
© Tin plated:	VA		
© Gold plated:			
flash VB	10μ"	VE	
3μ" VC	15μ"	VF	
5μ" VD	30μ"	VJ	
©Duplex plating:			
flash VK	15μ"	VP	
3μ" VL	10μ"	VN	
5μ" VM	30μ"	VU	
©Standard:	VB		

Recommended P.C.Board Hole Layout

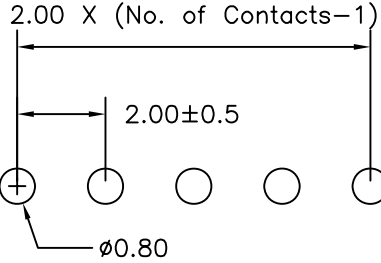

APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	.X' ± X'
.X ± X	.X' ± X'

REV. A	DRAWN	03/31/08
DATE 03/31/08	CHECKED	
SCALE 5:1	APPROVED	
UNIT mm		



LE Series  
 2.00mm Board Stacker - Single  
 PRODUCT NO. LE-XX-XX-A/C/B-FG  
 FILE NAME: LE LF APD.DWG