

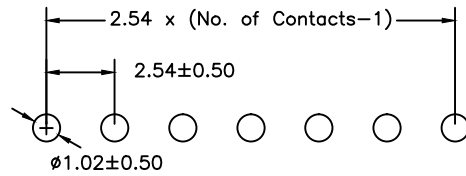
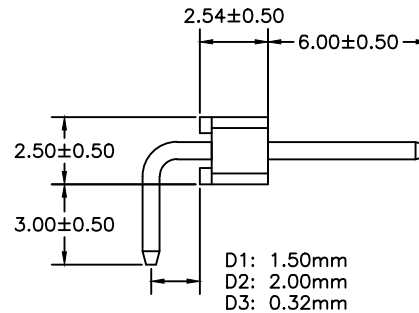


Recommended P.C.B.
Hole Layout

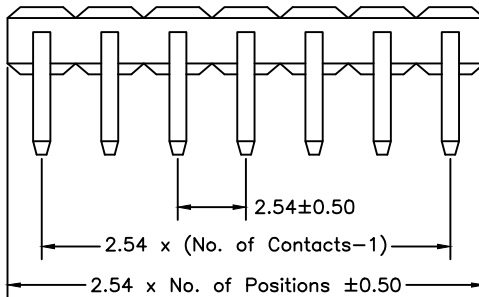

□ 0.64 ± 0.05

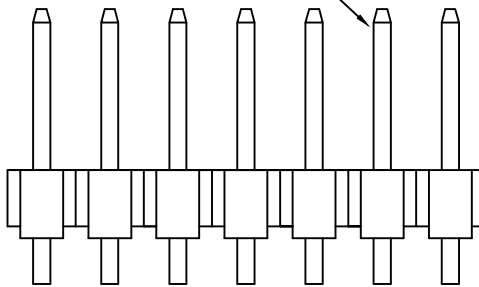

SPECIFICATIONS

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min.
Contact Resistance: 20 m ohms max.
Dielectric withstanding: AC 1000V
Operating Temperature: -40°C~+105°C
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
●Standard: Nylon-6T
Finish: Tin, Gold or Duplex Plating
●Standard: Gold Flash all over
Duplex Plating: Gold Plated on contact area
Tin Plated on solder area

LHY-XXDX-XX-060/030-FG

Number of Contacts
Angle Depth
Contact Plating
FG: High Temp RoHS Compliant
Pin Length in mm
A=6.0mm/B=3.0mm Standard
Other Lengths Avail.

Definition	Code
◎ Tin plated:	VA
◎ Gold plated:	
flash VB 10μ"	VE
3μ" VC 15μ"	VF
5μ" VD 30μ"	VJ
◎Duplex plating:	
flash VK 10μ"	VP
3μ" VL 15μ"	VN
5μ" VM 30μ"	VU
◎Standard: VB	

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± X
XX.	± X	.XXX	± X
X.	± X	X.	± X
.X	± X	.X	± X
REV.	1	DRAWN	08/24/08
DATE	08/24/08	CHECKED	
SCALE	5:1	APPROVED	
UNIT	mm		

APTOS TECHNOLOGY

LHY Series
2.54mm Pin Header - R/A Down
PRODUCT NO. LHY-XXDX-XX-A/B-FG
FILE NAME: LHY D LF APD.DWG