

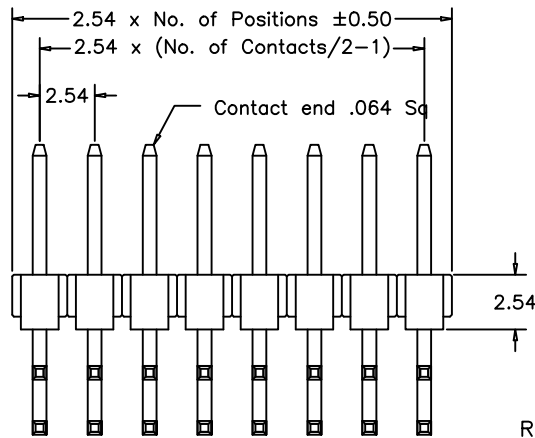



# SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min.
- Dielectric withstanding: AC 1000V
- Operating Temperature: -40°C~+105°C
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plating
- Standard: Gold Flash all over
- Duplex Plating: Gold Plated on contact area  
Tin Plated on solder area


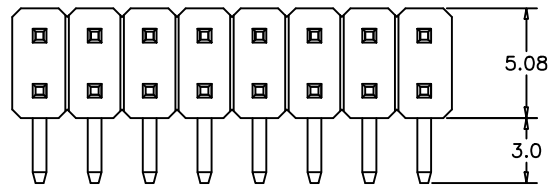


R1 = 1.5mm  
R2 = 2.0mm

LHZ-XXRX-XX-060/030-FG  
 Number of Contacts: XX  
 R1=1.5mm RA  
 R2=2.0mm RA  
 FG: High Temp RoHS Compliant  
 Pin Length mm: 060/030  
 6.0mm/3.0mm Standard (other lengths avail)

### Contact Plating

Definition	Code
● Tin plated:	VA
● Gold plated:	
flash VB	10μ" VE
3μ" VC	15μ" VF
5μ" VD	30μ" VJ
● Duplex plating:	
flash VK	10μ" VP
3μ" VL	15μ" VN
5μ" VM	30μ" VU
● Standard:	VB

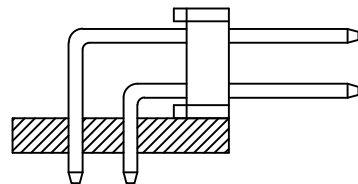

Recommended P.C.B. Layout

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	X. ± X
.X ± X	.X ± X



REV. 1	DRAWN	08/28/08	LHZ Series
DATE 08/28/08	CHECKED		2.54 mm Header - Right Angle
SCALE 3:1	APPROVED		PRODUCT NO. LHZ-XXXX-X-A/B-FG
UNIT mm		SIZE A4	FILE NAME: LHZ RX LF APD.DWG

APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited