
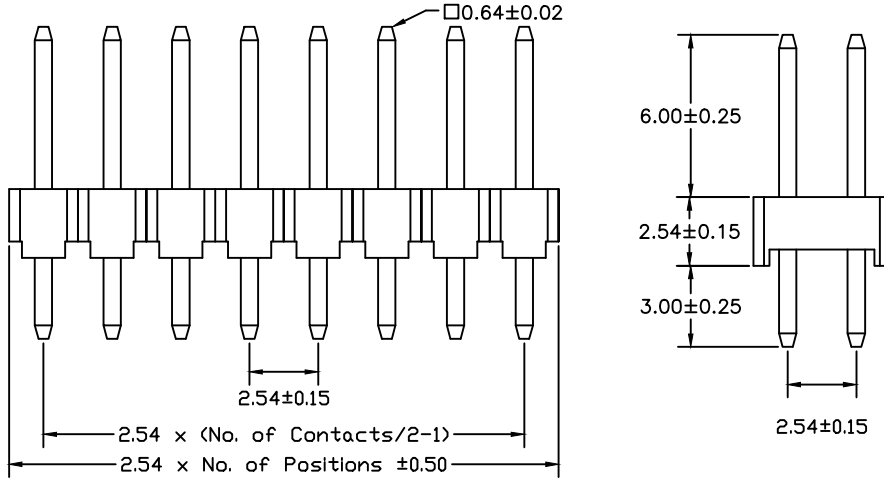


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric withstanding: AC 1000V
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 ◎Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plating
 ◎Standard: Gold Flash all over
 Duplex Plating: Gold Plated on contact area
 Tin Plated on solder area

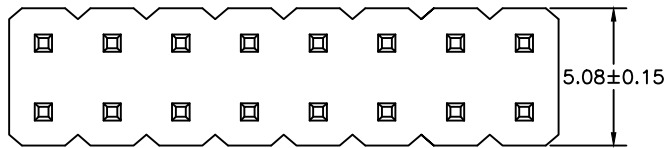

LHZ-XXS-XX-060/030-FG
 Number of Contacts: [] Pin Length mm: [] FG: High Temp RoHS Compliant
 6.0mm/3.0mm Standard (other lengths avail)

Contact Plating

Definition	Code		
◎ Tin plated:	VA		
◎ Gold plated:			
flash VB	10μ"	VE	
3μ" VC	15μ"	VF	
5μ" VD	30μ"	VJ	
◎ Duplex plating:			
flash VK	10μ"	VP	
3μ" VL	15μ"	VN	
5μ" VM	30μ"	VU	
◎ Standard:	VB		

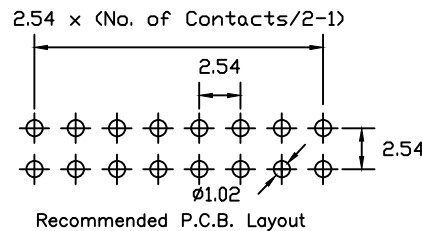

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	X. ± X
.X ± X	.X ± X
REV. 1	DRAWN
DATE 08/28/08	CHECKED
SCALE 5:1	APPROVED
UNIT mm	

08/28/08	LHZ Series
	2.54mm Dual Row Pin Header
	PRODUCT NO. LHZ-XXS-XX-060/030-FG
	FILE NAME: LHZ S LF APD.DWG