

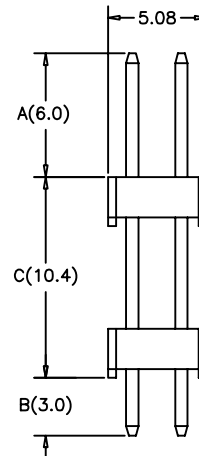
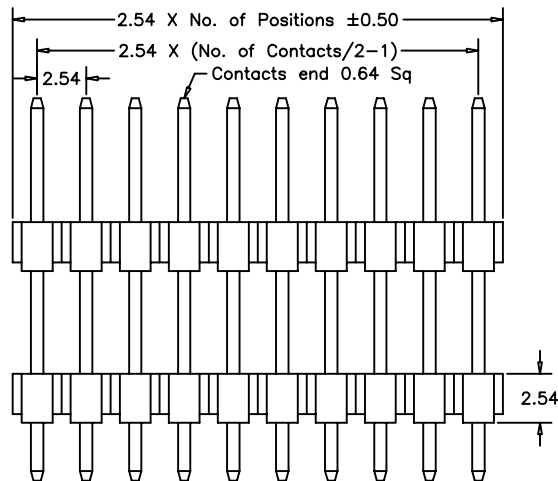



SPECIFICATIONS

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min.
Dielectric withstanding: AC 500V
Operating Temperature: -40°C~+105°C
Max Processing Temp: 260° for 10 seconds
Contact Material: Brass/Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
 ◎Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plating
 ◎Standard: Gold Flash all over
Duplex Plating: Gold Plated on contact area
Tin Plated on solder area



Recommended P.C.Board
Hole Layout



APTOS Technology CONFIDENTIAL

This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

LK-XX-XX-A/C/B-FG
 Number of Contacts | | | FG: High Temp RoHS Compliant
 | | |
 Contact Plating *Standard 060/104/030
 Other Lengths Avail.

Definition		Code
◎ Tin plated:		
◎ Gold plated:		
flash	VB	10 μ" V
3 μ"	VC	15 μ" V
5 μ"	VD	30 μ" V
◎ Duplex plating:		
flash	VK	15 μ" V
3 μ"	VL	10 μ" V
5 μ"	VM	30 μ" V
◎ Standard: VB		

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX. ± X	.XX ± X		
XX. ± X	.XXX ± X		
X. ± X	X.* ± X*		
.X ± X	.X* ± X*		
REV. 1	DRAWN	06/14/06	LK Series 2.54mm Board Stacker PRODUCT NO. LK-XX-XX-A/C/B-FG FILE NAME: LK LF APD.DWG
DATE 06/14/06	CHECKED		
SCALE 2.5:1	APPROVED		
UNIT mm		SIZE A4	