
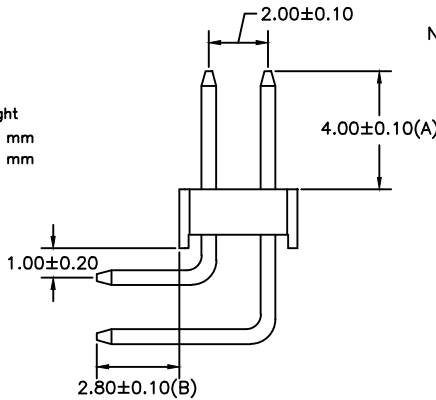
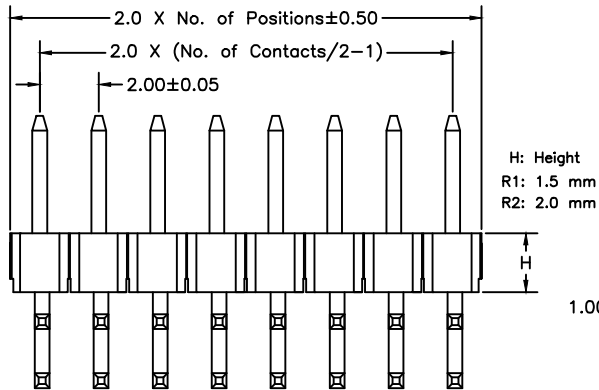


SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°C~+105°C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 ●Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plating
 ●Standard: Gold Flash all over
 Duplex Plating: Gold Plated on contact area
 Tin Plated on solder area

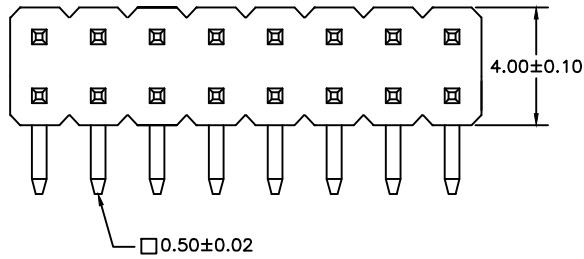

LTZ-XXRX-XX-040/028-FG


Number of Contacts
 Insulator Height
 R1: 1.5 mm
 R2: 2.0 mm

Contact Plating

Definition	Code
● Tin plated:	VA
● Gold plated:	
flash VB 10μ"	VE
3 μ" VC 15μ"	VF
5 μ" VD 30μ"	VJ
● Duplex plating:	
flash VK 10μ"	VN
3 μ" VL 15μ"	VP
5 μ" VM 30μ"	VU
● Standard:	VB

-FG: High Temp RoHS Compliant (Nylon-6T or Greater)
 Pin Length mm

Recommended P.C.B. Layout

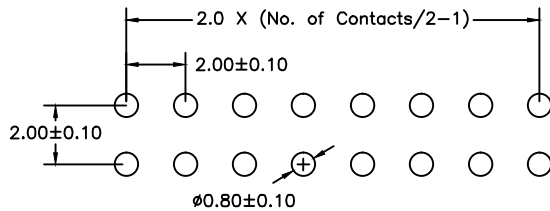

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.05
XX. ± X	.XXX ± X
X. ± 0.20	X.' ± X'
.X ± 0.10	.X' ± X'

APTOS TECHNOLOGY

REV. B	DRAWN	07/02/08
DATE 07/02/08	CHECKED	
SCALE 6:1	APPROVED	
UNIT mm		SIZE A4

LTZ Series
 2.0mm Pin Header - Right Angle
 PRODUCT NO. LTZ-XXRX-XX-A/B-FG
 FILE NAME: LTZ RX LF APD.DWG

REV.	DESCRIPTION	DATE
B	P/N Change - Add Pin Desig.	07/02/08