
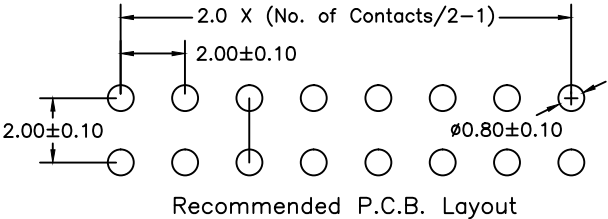
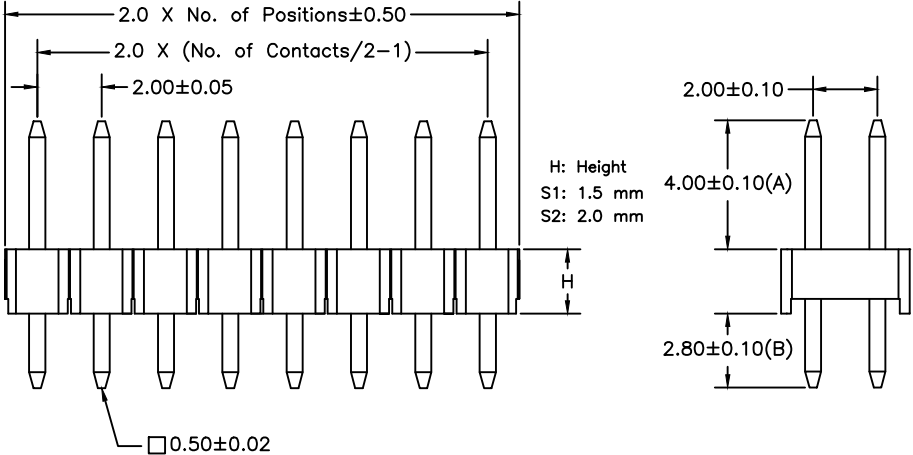


APTOS Technology CONFIDENTIAL  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

### SPECIFICATIONS

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500V  
 Operating Temperature: -40°C~+105°C  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 ◎Standard: Nylon-6T  
 Finish: Tin, Gold or Duplex Plating  
 ◎Standard: Gold Flash all over  
 Duplex Plating: Gold Plated on contact area  
 Tin Plated on solder area

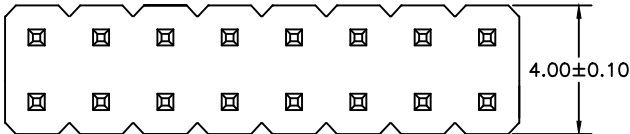

LTZ-XXSX-XX-040/028-FG  
 Number of Contacts: XX  
 Insulator Height: 040  
 S1: 1.5 mm  
 S2: 2.0 mm  
 Pin Length mm: 028  
 FG: High Temp RoHS Compliant (Nylon-6T or Greater)

Contact Plating			
Definition	Code		
◎ Tin plated:	VA		
◎ Gold plated:			
flash	VB	10μ"	VE
3μ"	VC	15μ"	VF
5μ"	VD	30μ"	VJ
◎Duplex plating:			
flash	VK	10μ"	VP
3μ"	VL	15μ"	VN
5μ"	VM	30μ"	VU
◎Standard: VB			

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.05
XX. ± X	.XXX ± X
X. ± 0.20	X. ± X
.X ± 0.10	.X ± X
REV. B	DRAWN
DATE 10/01/05	CHECKED
SCALE 6:1	APPROVED
UNIT mm	



10/01/05  
 LTZ Series  
 2.0mm Pin Header – Dual Row  
 PRODUCT NO. LTZ-XXSX-XX-A/B-FG  
 FILE NAME: LTZ SX LF APD.DWG

REV.	DESCRIPTION	DATE
B	P/N Change – Add RoHS	07/02/08