
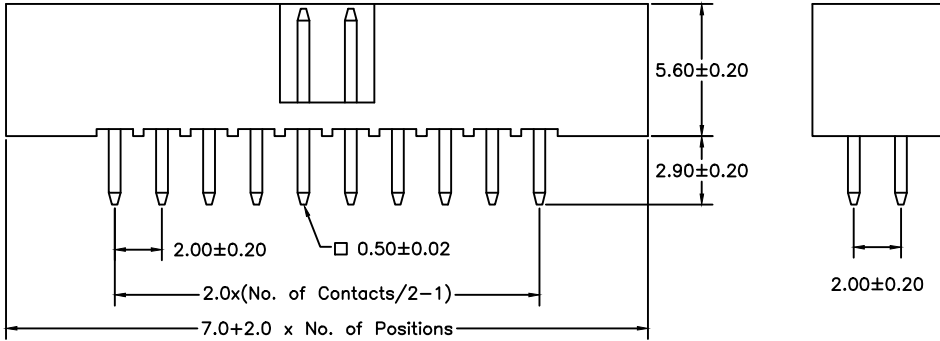



SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40~+105°C
 Max Processing Temp: 230° for 30 seconds
 (260° for 10 seconds)
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T
 Finish: Gold plated
 © Standard: Gold flash all over

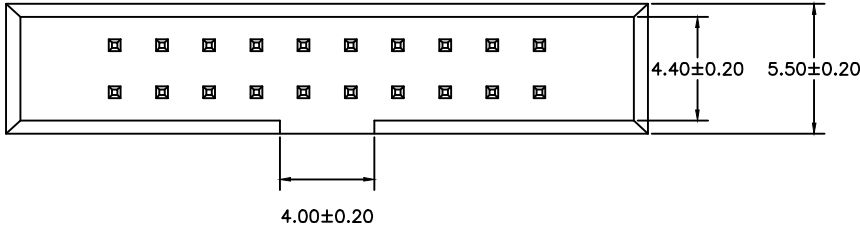

MBH-XXSX-XX-029-FG
 Number of Contacts: []
 Straight: []
 Pin Type:
 5: Blunt Cut
 6: Formed Pin
 Contact Plating
 FG: High Temp RoHS Compliant (Nylon-6T or Greater)
 Pin Length - 2.90mm (other lengths avail)

Definition	Code
Tin plated	VA
Duplex Plated	VK
© Gold plated:	
flash VB	10μ" VE
3μ" VC	15μ" VF
5μ" VD	30μ" VJ
©Standard: VB	

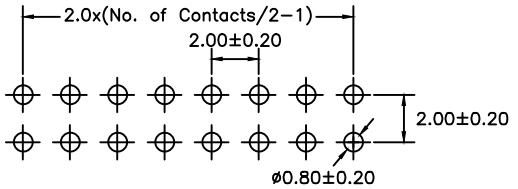

Recommended P.C.B. Layout

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.05
XX. ± X	.XXX ± X
X. ± 0.20	X' ± X'
.X ± 0.10	.X' ± X'



REV. A	DRAWN	07/03/08	MBH Series 2.0mm Box Header
DATE 07/03/08	CHECKED		
SCALE 4:1	APPROVED		PRODUCT NO. MBH-XXSX-XX-029-FG
UNIT mm		SIZE A4	FILE NAME: MBH SX LF APD.DWG