
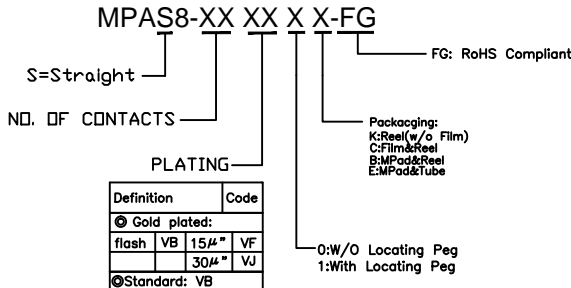





CIRCUITS	DIM A	DIM B
10	2.00	3.98
12	2.50	4.48
14	3.00	4.98
16	3.50	5.48
18	4.00	5.98
20	4.50	6.48
22	5.00	6.98
24	5.50	7.48
26	6.00	7.98
28	6.50	8.48
30	7.00	8.98
32	7.50	9.48
34	8.00	9.98
36	8.50	10.48
38	9.00	10.98
40	9.50	11.48
42	10.00	11.98
44	10.50	12.48
46	11.00	12.98
48	11.50	13.48
50	12.00	13.98
52	12.50	14.48
54	13.00	14.98
56	13.50	15.48
58	14.00	15.98
60	14.50	16.48
70	17.00	18.98
80	19.50	21.48
90	22.00	23.98
100	24.50	26.48
110	27.00	28.98
120	29.00	30.98

SPECIFICATIONS

Current Rating: 0.5 Amps AC/DC Max.
 Insulator Resistance: 100 Megohms min.
 Contact Resistance: 60m ohm Max.
 Dielectric withstanding: AC 500V

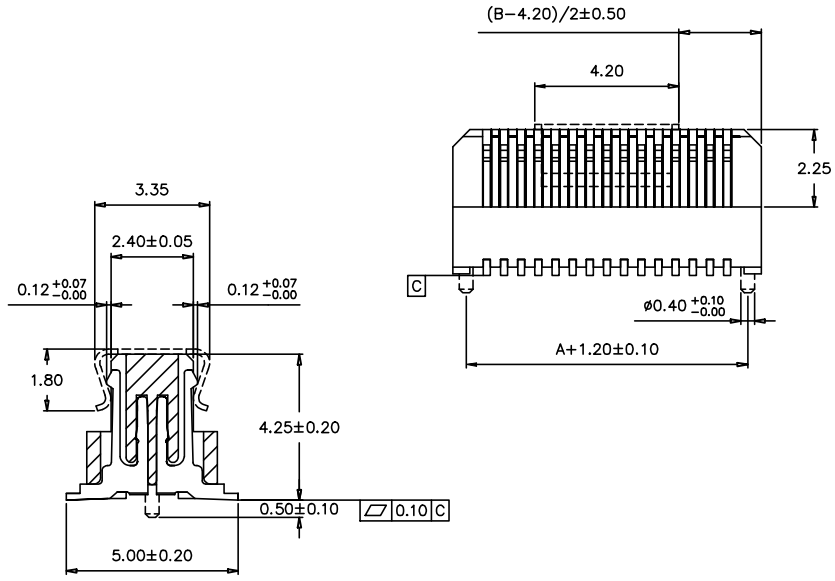

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

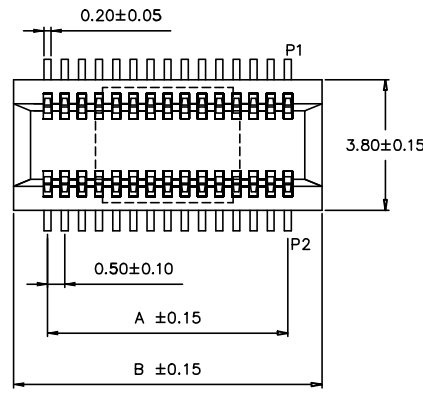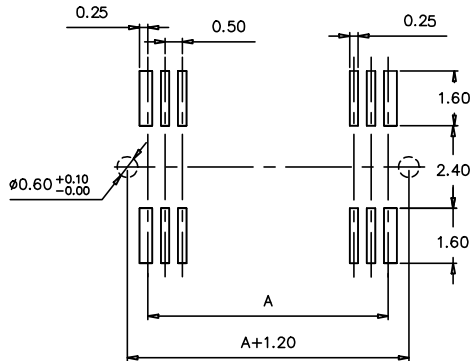

PIN	FILM P/N	DIM.W
10~18	KT004	Ø4.0
20~120	KT022	6.00

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X.' ± 1"
.X ± 0.30	.X" ± X"



REV.	A	DRAWN	09/15/09	MPAS8 Series
DATE	09/15/09	CHECKED		0.5mm Board to Board Plug
SCALE	As shown	APPROVED		PRODUCT NO. MPAS8-XXXXXX-FG
UNIT	mm		SIZE A4	FILE NAME MPAS8-XXXXXX-FG.dwg