
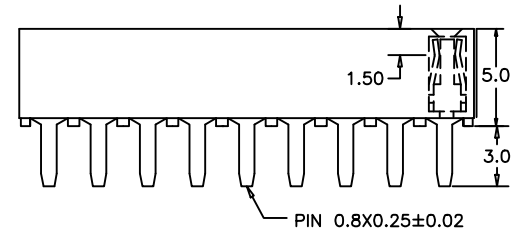



APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited







SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 500V
- Operating Temperature: -40°C~+105°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
 - Standard: Nylon-6T
- Finish: Tin, Gold, or Duplex Plated
 - Standard: Gold Flash all over
- Duplex Plating: Gold Plated on contact area
Tin Plating on solder area

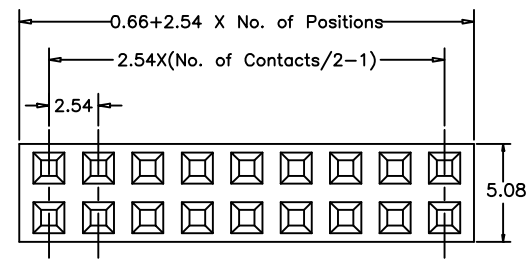

PBFX-XX-XX-030-FG
 Type: _____ High Temp RoHS Compliant
 W: 3.81mm
 F: 5.08mm
 G: 7.62mm
 Number of Contacts _____ Pin Length mm
 Contact Plating _____

Definition	Code
● Tin plated:	VA
● Gold plated:	
flash VB	10μ" VE
3μ" VC	15μ" VF
5μ" VD	30μ" VJ
●Duplex plating:	
flash VK	10μ" VP
3μ" VL	15μ" VN
5μ" VM	30μ" VU
●Standard:	VB

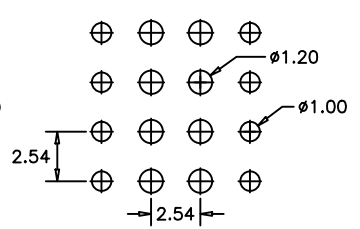

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	X.' ± X'
.X ± X	.X' ± X'

REV. A	DRAWN	07/14/04
DATE 07/10/08	CHECKED	
SCALE As shown	APPROVED	
UNIT mm		SIZE A4

APTOS TECHNOLOGY

PBFX Series
 2.54 mm Socket - Dual Entry
 PRODUCT NO. PBFX-XX-XX-030-FG
 FILE NAME: PBFX LF APD.DWG