





APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V
- Operating Temperature: -40°C~+105°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold, or Duplex Plated
- Standard: Gold Flash all over
- Duplex Plating: Gold Plated on contact area
Tin Plating on solder area

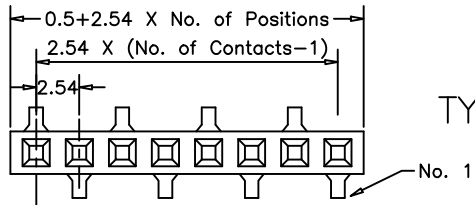




TYPE B1

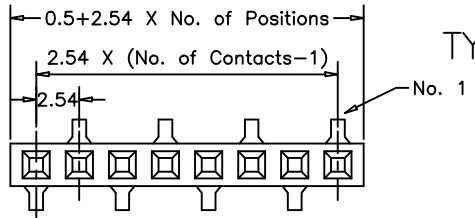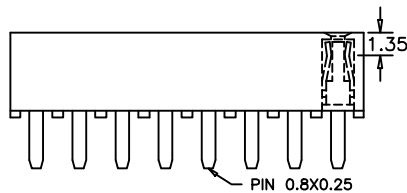

TYPE B2

PBFY-XXBX-X-030-FG
 Number of Contacts: XX, Pin Length mm: 030, High Temp RoHS Compliant
 Type: B1 or B2, Contact Plating: FG

Definition	Code
● Tin plated:	VA
● Gold plated:	
flash VB 10μ"	VE
3μ" VC 15μ"	VF
5μ" VD 30μ"	VJ
●Duplex plating:	
flash VK 10μ"	VP
3μ" VL 15μ"	VN
5μ" VM 30μ"	VU
●Standard:	VB

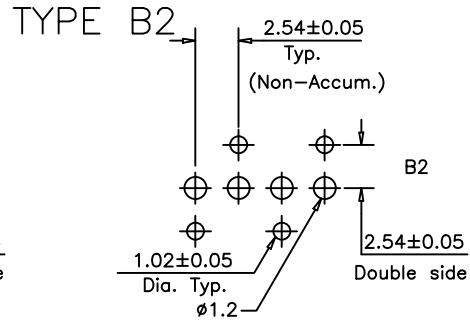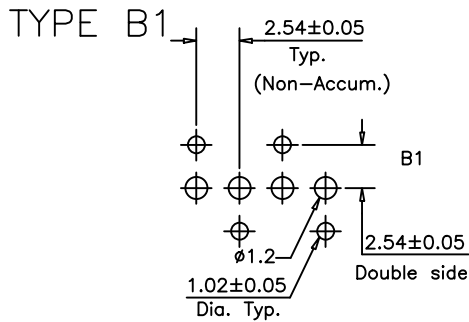

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± X
XX. ± X	.XXX ± X
X. ± X	X. ± X
.X ± X	.X ± X



REV. 1	DRAWN	07/10/08	PBFY Series
DATE 07/10/08	CHECKED		2.54 mm Socket - Dual Entry
SCALE As shown	APPROVED		PRODUCT NO. PBFY-XXBX-X-030-FG
UNIT mm		SIZE A4	FILE NAME: PBFY LF APD.DWG