

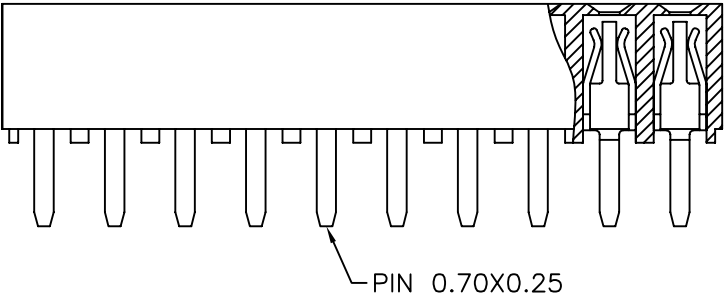


SPECIFICATIONS

- Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min.
Contact Resistance: 20 m ohms max.
Dielectric withstanding: AC 1000V
Operating Temperature: -40°C~+105°C
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
 ⓈStandard: Nylon-6T
 Finish: Tin, Gold or Duplex Plating
 ⓈStandard: Gold Flash all over
Duplex Plating: Gold Plated on contact area
 Tin Plated on solder area

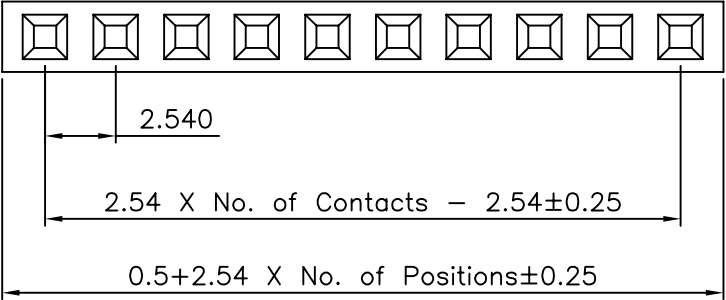


Recommended P.C.B. Layout

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

PDFY-XXX-XX-030-FG
Number of Contacts
S: Straight
R: Right Angle
Contact Plating
High Temp RoHS Compliant
Pin Length mm

Definition	Code
Ⓢ Tin plated:	VA
Ⓢ Gold plated:	
flash VB 10μ"	VE
3μ" VC 15μ"	VF
5μ" VD 30μ"	VJ
Ⓢ Duplex plating:	
flash VK 15μ"	VP
3μ" VL 10μ"	VN
5μ" VM 30μ"	VU
ⓈStandard: VB	

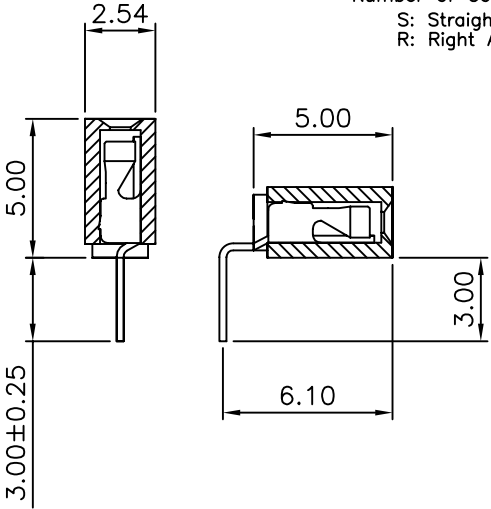

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX. ± X	.XX ± 0.25		
XX. ± X	.XXX ± 0.13		
X. ± X	X' ± 5'		
.X ± 0.38	.X' ± X'		
REV. A	DRAWN	12/05/08	PDFY Series 2.54 mm Female Socket
DATE 12/05/08	CHECKED		
SCALE 4:1	APPROVED		PRODUCT NO. PDFY-XXX-XX-030-FG
UNIT mm		SIZE A4	FILE NAME: PDFY LF APD.DWG