
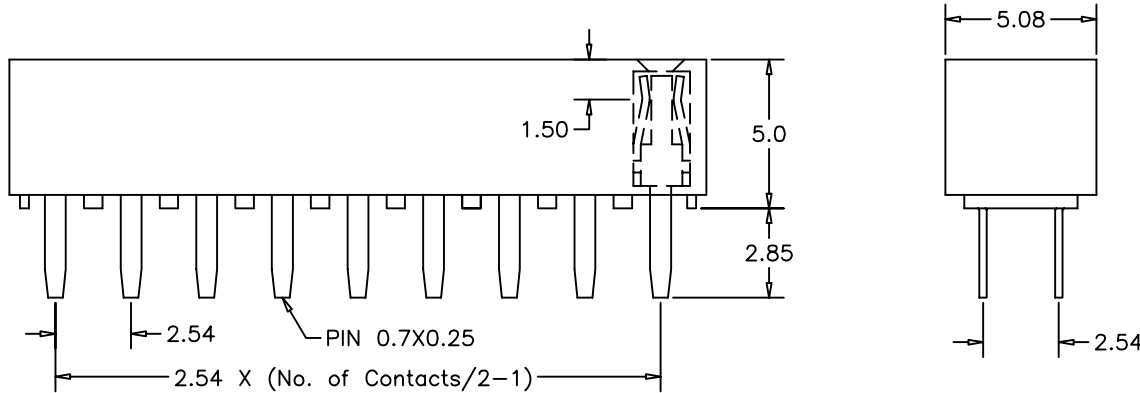



# SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V
- Operating Temperature: -40°C~+105°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- ◎Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plating
- ◎Standard: Gold Flash all over
- Duplex Plating: Gold Plated on contact area  
Tin Plated on solder area

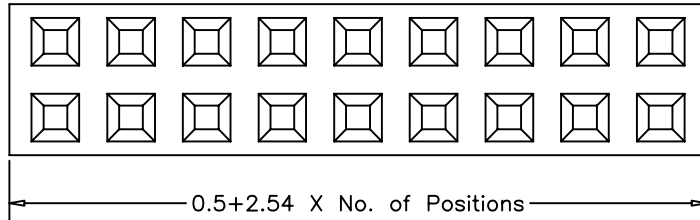


PDFZ-XXX-XX-028-FG  
 Number of Contacts: XXX  
 Straight: XX  
 Contact Plating: 028  
 Pin Length 2.85 mm: FG  
 FG: High Temp RoHS Compliant

Definition	Code		
◎ Tin plated:	VA		
◎ Gold plated:			
flash	VB	10μ"	VE
3μ"	VC	15μ"	VF
5μ"	VD	30μ"	VJ
◎Duplex plating:			
flash	VK	15μ"	VP
3μ"	VL	10μ"	VN
5μ"	VM	30μ"	VU
◎Standard:	VB		

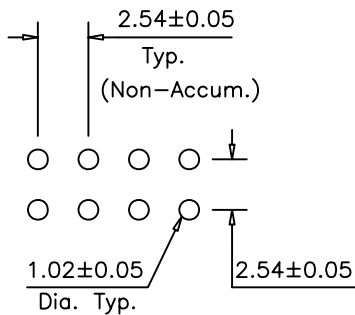

Recommended P.C.Board Hole Layout



**APTOS Technology CONFIDENTIAL**  
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.25
XX. ± X	.XXX ± 0.13
X. ± X	.X' ± 5'
.X ± 0.38	.X' ± X'
REV. 1	DRAWN
DATE 08/21/08	CHECKED
SCALE 3:1	APPROVED
UNIT mm	SIZE A4



08/21/08	PDFZ Series 2.54 mm Female Socket
PRODUCT NO. PDFZ-XXS-XX-028-FG	FILE NAME: PDFZ LF APD.DWG