


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric withstanding: AC 1000V
 Operating Temperature: -40°C~+105°C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 © Standard: P.B.T.

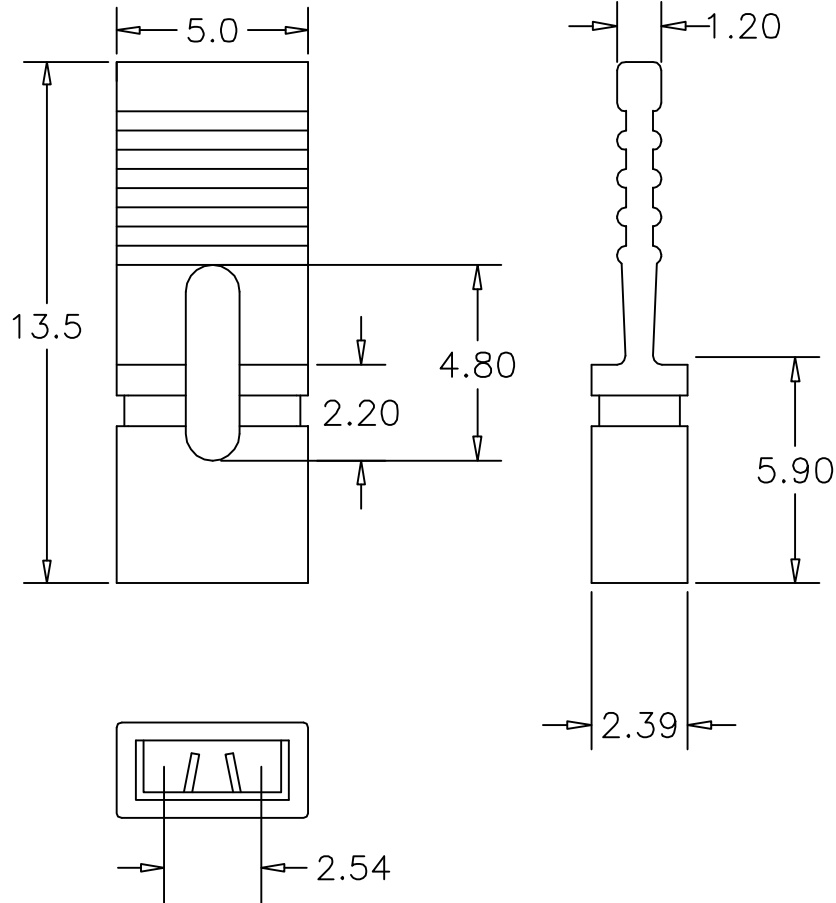

PHJ-HB-VB-G
 Shunt Type: 13.5mm Open | Contact Plating | G: RoHS Compliant

Definition	Code
⊙Gold Flash	VB

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± X	X' ± 2'
.X ± 0.20	.X' ± X'



REV. B	DRAWN	03/17/05	PHJ Series 2.54 mm Shunt - 13.5 mm Height
DATE 03/17/05	CHECKED		
SCALE 3.8:1	APPROVED		PRODUCT NO. PHJ-XX-X-*
UNIT mm		SIZE A4	FILE NAME: PHJ-HB LF APD.DWG