



SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric withstanding: AC 1000V
 Operating Temperature: -40°C~+105°C
 Contact Material: Copper Alloy
 Insulator Material: P.B.T. + 15% Polyester,
 UL-94V-0, Nylon

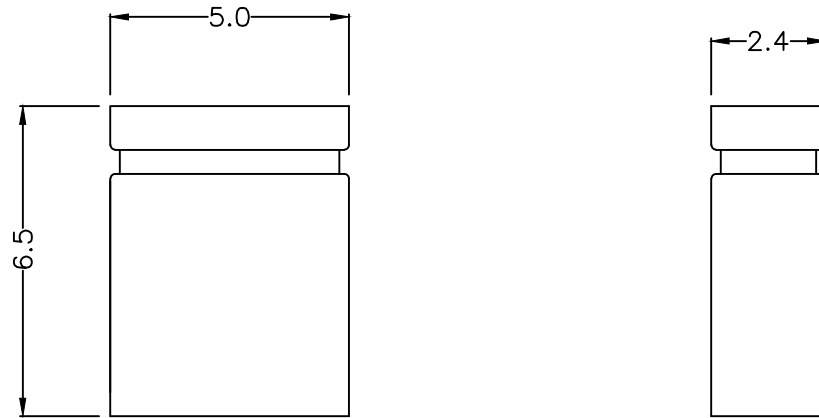

PHJ-MA-VB-G
 Shunt Type: 6.5mm Closed G: RoHS Compliant

Contact Plating

Definition	Code
ⓄGold Flash	VB
30u" Gold	VJ

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± X	X.' ± 2'
.X ± 0.20	.X' ± X'
REV. A	DRAWN
DATE 05/19/08	CHECKED
SCALE 1:1	APPROVED
UNIT mm	



05/19/08
PHJ Series
 2.54 mm Shunt - 6.5mm Closed Type
 PRODUCT NO. PHJ-XX-X-*
 FILE NAME: PHJ-MA LF APD.DWG