

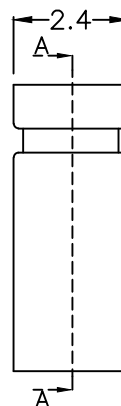


APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

SPECIFICATIONS

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min.
Contact Resistance: 20 m ohms max.
Dielectric withstanding: AC 1000V
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material: Copper Alloy
Insulator Material: P.B.T. + 15% Polyester, UL-94V-0, Nylon

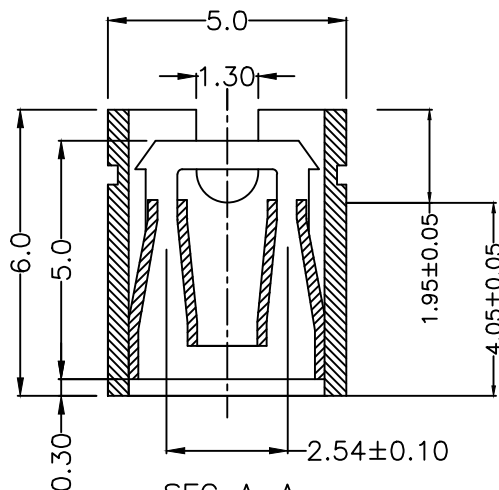

PHJ-MB-VB-G

Shunt Type: 6.0mm Open G: RoHS Compliant

Contact Plating

Definition	Code
◎Gold Flash	VB
30u" Gold	VJ

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED				
XXX. ± X	.XX ± 0.10			
XX. ± X	.XXX ± X		PHJ Series 2.54 mm Shunt	
X. ± X	X' ± 2'			
.X ± 0.20	.X' ± X'			
REV. B	DRAWN	03/17/05	PRODUCT NO. PHJ-XX-X-* FILE NAME: PHJ-MB LF APD.DWG	
DATE 03/17/05	CHECKED			
SCALE 1:1	APPROVED		SIZE A4	
UNIT mm	