
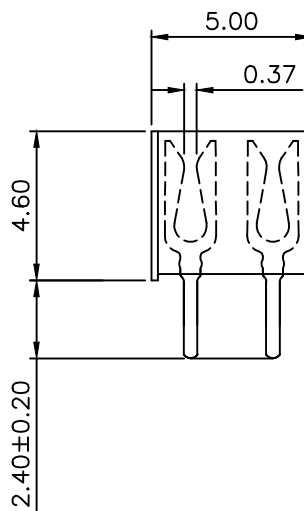
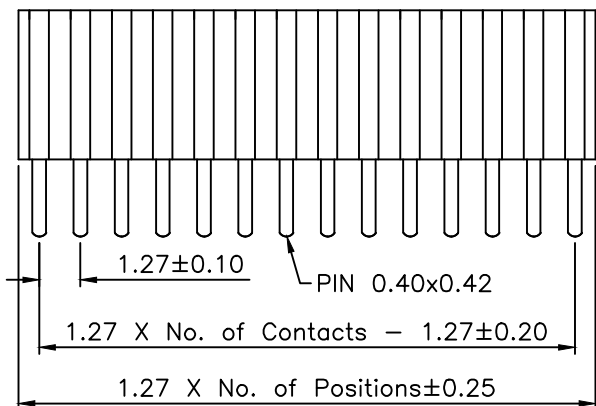
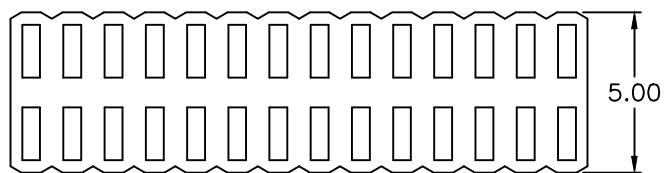


Recommended P.C.B. Layout



SPECIFICATIONS

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 500V
- Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- ⊙Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plating
- ⊙Standard: Gold Flash all over

PRSZ-XX-XX-024-FG

Number of Contacts | Contact Plating | FG: High Temp RoHS Compliant (Nylon-6T or Greater)

Pin Length (mm)		
1.50	2.40	3.00
*2.40 Standard		

Definition	Code	
⊙ Tin plated:	VA	
⊙ Gold plated:		
flash VB	10 μ "	VE
3 μ " VC	15 μ "	VF
5 μ " VD	30 μ "	VJ
⊙Duplex plating:		
flash VK	10 μ "	VP
3 μ " VL	15 μ "	VN
5 μ " VM	30 μ "	VU
⊙Standard:	VB	

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	\pm X	.XX	\pm 0.25
XX.	\pm X	.XXX	\pm 0.13
X.	\pm X	X.	\pm 5"
.X	\pm 0.38	.X'	\pm X'
REV.	A	DRAWN	01/27/09
DATE	01/27/09	CHECKED	
SCALE	5:1	APPROVED	
UNIT	mm		



PRSZ Series
 1.27 mm Dual Row Female Header
 PRODUCT NO. PRSZ-XX-XX-024-FG
 FILE NAME: PRSZ LF APD.DWG