
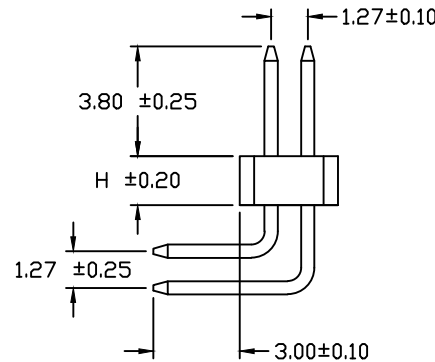
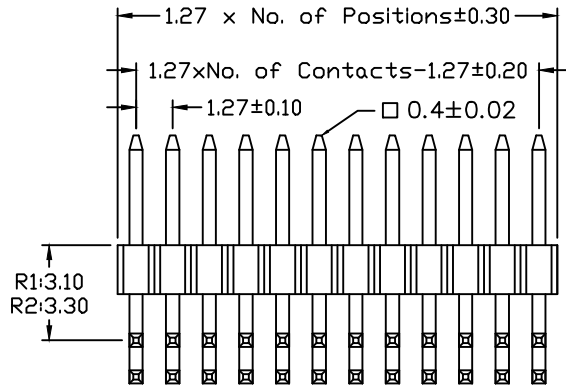


SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°C~+105°C
 Max Processing Temp: 230° for 30 seconds
 260° for 10 seconds


Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 ●Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plating
 ●Standard: Duplex Plated
 Duplex Plating: Gold Plated on contact area
 Tin Plated on solder area

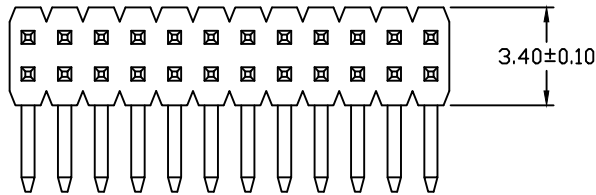

QOT-XXRX-XX-038/030-FG
 Number of Contacts: [] FG: High Temp RoHS Compliant
 Straight [] Pin Length mm

Dimension "H"		Contact Plating	
R1	2.70mm	Definition	Code
R2	1.70mm	● Tin plated:	VA
● Gold plated:			
flash	VB	10μ"	VE
3μ"	VC	15μ"	VF
5μ"	VD	30μ"	VJ
● Duplex plating:			
flash	VK	10μ"	VP
3μ"	VL	15μ"	VN
5μ"	VM	30μ"	VU
●Standard: VB			

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)



GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± X	X.' ± 5'
.X ± 0.35	.X' ± X'



REV. A	DRAWN	08/20/09	QOT Series
DATE 08/20/09	CHECKED		1.27 mm Dual Row, R/A, Pin Header
SCALE 4:1	APPROVED		PRODUCT NO. QOT-XXRX-XX-038/030-FG
UNIT mm		SIZE A4	FILE NAME: QOT LF APD.DWG