
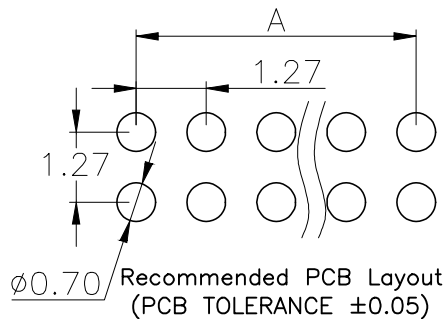
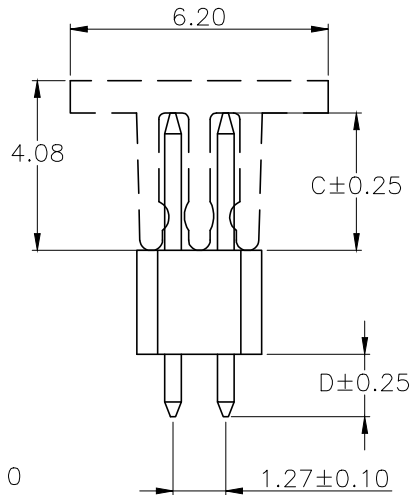
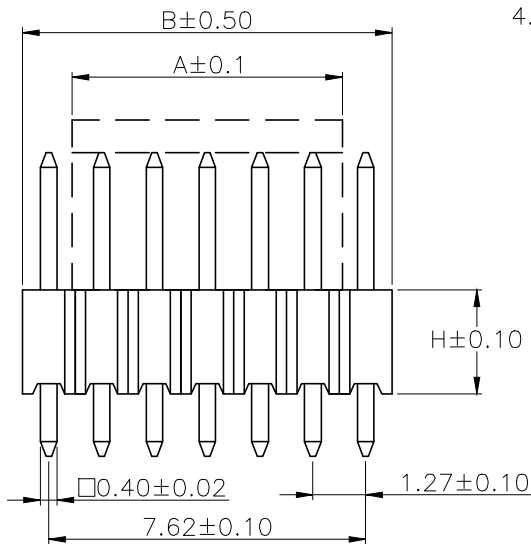


No. of Contacts	DIMENSIONS	
	A	B
6	2.84	3.81
8	3.81	5.08
10	4.08	6.35
12	6.35	7.62
14	7.62	8.89
16	8.89	10.16
18	10.16	11.43
20	11.43	12.70
22	12.70	13.97
24	13.97	15.24
26	15.24	16.51
28	16.51	17.78
30	17.78	19.05
32	19.05	20.32
34	20.32	21.59
36	21.59	22.86
38	22.86	24.13
40	24.13	25.40
42	25.40	26.67
44	26.67	27.94
46	27.94	29.21
48	29.21	30.48
50	30.48	31.75
52	31.75	33.02
54	33.02	34.29
56	34.29	35.56
58	35.56	36.83
60	36.83	38.10
62	38.10	39.37
64	39.37	40.64
66	40.64	41.91
68	41.91	43.18
70	43.18	44.45
72	44.45	45.72
74	45.72	46.99
76	46.99	48.26
78	48.26	49.53
80	49.53	50.80
82	50.80	52.07
84	52.07	53.34
86	53.34	54.61
88	54.61	55.88
90	55.88	57.15
92	57.15	58.42
94	58.42	59.69
96	59.69	60.96
98	60.96	62.23
100	62.23	63.50

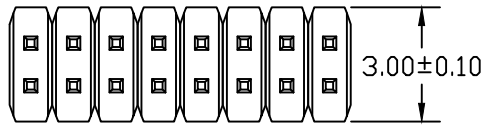

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20m Ohms Max. for Initial
 Operating Temperature: -40°C~+105°C
 Contact Retention Force: 250g Min. Per Contact
 Durability: 50 Cycles

QOZ-XXSX-XX-030/025-X-X-FG

Number of Contacts: Straight

Pin Length mm

FG: High Temp RoHS Compliant

Null: Tube
R: Pad&Reel

Null: Thermoplastic
F: High Temperature
Thermoplastic
H: Halogen Free

Dimension H/W	Definition	Code
S1 1.0x3.4mm	Tin plated:	VA
S2 1.5x3.4mm	Gold plated:	
S3 1.7x3/3.4mm	flash VB	10μ" VE
S4 2.0x3.0mm	3μ" VC	15μ" VF
S5 2.5x3/3.4mm	5μ" VD	30μ" VJ
S6 2.9x3.0mm	Duplex plating:	
S7 3.0x3.4mm	flash VK	10μ" VP
	3μ" VL	15μ" VN
	5μ" VM	30μ" VU
	Standard:	VB

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.20
XX. ± X	.XXX ± X
X. ± X	X.' ± 5'
.X ± 0.35	.X' ± X'
REV. A	DRAWN
DATE 07/28/2017	CHECKED
SCALE 4:1	APPROVED
UNIT mm	



08/24/09	QOZ Series
	1.27 mm, Dual Row, Pin Header
	PRODUCT NO. QOZ-XXSXXX030/028XX-FG
	FILE NAME: QOZ LF APD.DWG

SIZE A4