


SPECIFICATIONS

Current Rating: 10 Amps
Voltage Rating: 300 VAC
Dielectric withstanding: 1.6KV
Operating Temperature: -40°C to +115°C
Max Processing Temp: 260°C±5°C for 5 seconds
Contact Material: Copper with Tin Plating
Insulator Material: Thermoplastic, UL 94V-0
Safety Approval: 

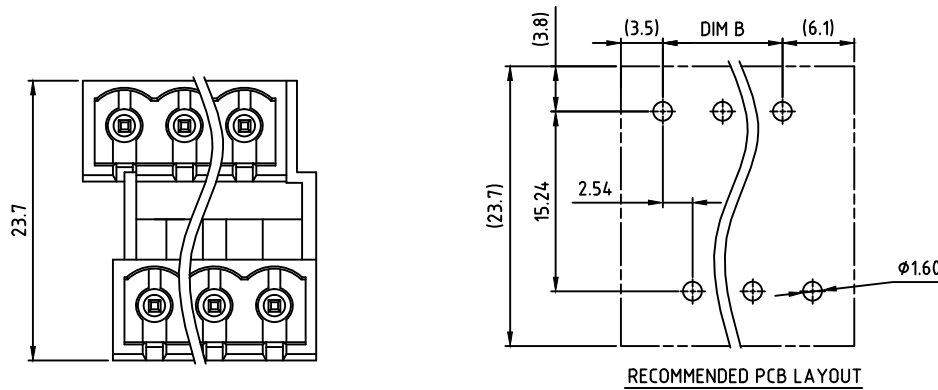


RPEU-xx E A x J-FG

Poles
04 2x2Poles
06 2x3Poles
...
48 2x24Poles

FG: RoHS Compliant
(Lead <4% in Copper Alloy)

COLOR
J: Black(RAL9005)
B: Red(RAL3001/D)
C: Orange(RAL2011/P)
D: Yellow(RAL1018/A)
E: Green(RAL6018/T)
F: Blue(RAL5015/A)
H: Grey(RAL7035/D)

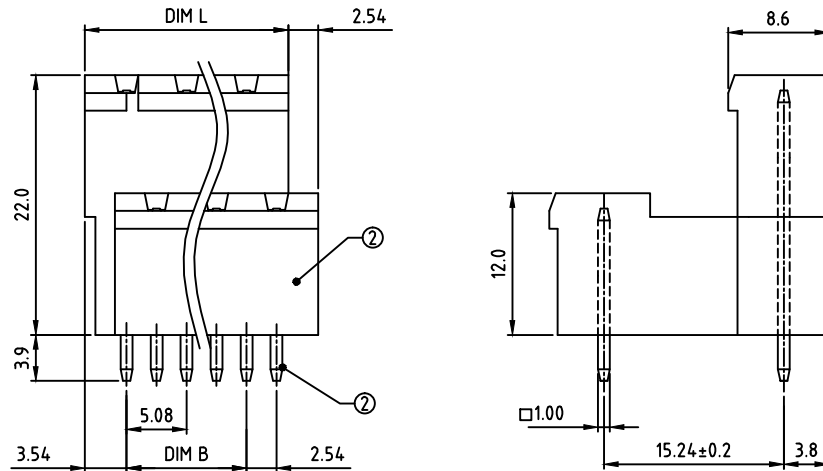

Poles	2x2p	2x3p	2x4p	2x5p	2x6p	2x7p	2x8p	2x9p	2x10p	2x11p	2x12p	2x13p
Dim L	12.16	17.24	22.32	27.40	32.48	37.56	42.64	47.72	52.80	57.88	62.96	68.04
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.15				±0.20				±0.25			
Poles	2x14p	2x15p	2x16p	2x17p	2x18p	2x19p	2x20p	2x21p	2x22p	2x23p	2x24p	
Dim L	73.12	78.20	83.28	88.36	93.44	98.52	103.60	108.68	113.76	118.84	123.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.25		±0.30				±0.35					

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED					
XXX.	±	X	.XX ± 0.10		
XX.	±	X	.XXX ± X		
X.	±	0.50	X' ± 1'		
.X	±	0.30	.X' ± 1'	REV. A DATE 04/03/09 SCALE as shown UNIT mm DRAWN CHECKED APPROVED  04/13/09 5.08 mm-Dual Row/Level Header PRODUCT NO. RPEU-XXEAXJ-FG FILE NAME RPEU-XXEAXJ-FG LF APD.DWG	
REV.	A	DRAWN			
DATE	04/03/09	CHECKED			
SCALE	as shown	APPROVED			
UNIT	mm				