




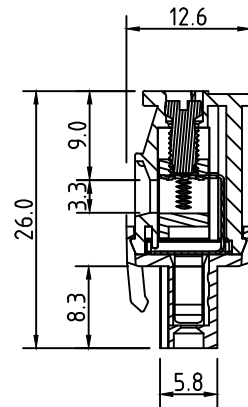
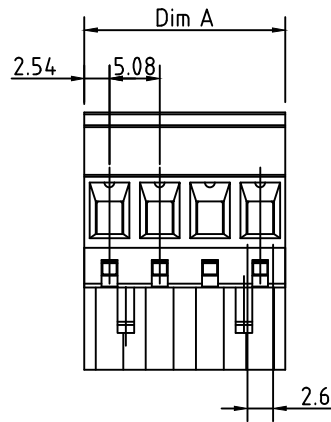


SPECIFICATIONS

- Voltage Rating: 300VAC/300VAC/300VAC
- Current Rating: 15 Amps/17 Amps/15 Amps
- Dielectric withstanding: 1.6KV/2.5KV/2.5KV
- Operating Temperature: -40°C to +115°C
- Contact Material: PhBz, Tin Plated
- Terminal Screw: Steel Zinc plating "-" slot type
- Insulator Material: Thermoplastic, UL 94V-0
- Wire Range: 2.5mm² /0.34-2.5mm²
- Wire Strip Length: 6-7mm
- Solid/Stranded Wire: 12-24 AWG
- Torque: 3.5Lb-In/0.5Nm/0.4Nm
- Clamp: Brass(CuZn) Ni plated
- Screw: M3
- Safety Approval:   



N=Number of contacts




RPGH-XXEAX1-FG

FG: RoHS Compliant
Pb<40000ppm

02 pole
...
24 pole

- J: Black(RAL9005)
- B: Red(RAL3001/D)
- C: Orange(RAL2011/P)
- D: Yellow(RAL1018/A)
- E: Green(RAL6018/T)
- F: Blue(RAL5015/A)
- H: Grey(RAL7035/D)

Dimensions	
A	N×5.08
B	(N-1)×5.08
Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X.' ± 1'
.X ± 0.30	.X' ± 1'
REV. A	DRAWN
DATE 10/20/09	CHECKED
SCALE 1.9:1	APPROVED
UNIT mm	

APTOS TECHNOLOGY

10/20/09	RPGH Series 5.08 mm Side Entry Plug
PRODUCT NO. RPGH-XXEAE1-FG	FILE NAME: RPGH-XXEAE1-FG LF APD.DWG
SIZE A4	

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited