
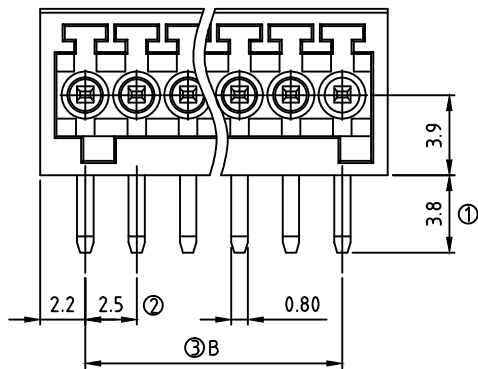
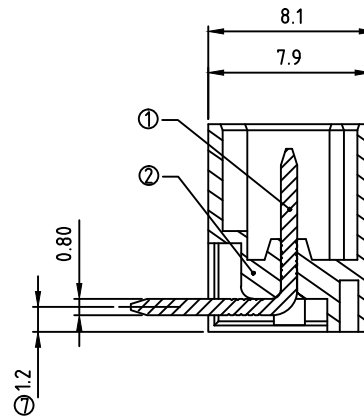


PCB Layout

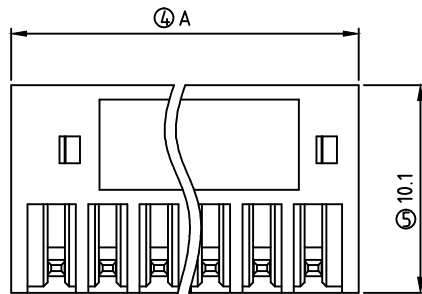

POLE		2	3	4	5	6	7	8	9	10	11	12
A		6.90	9.40	11.90	14.40	16.90	19.40	21.90	24.40	26.90	29.40	31.90
B		2.50	5.00	7.50	10.00	12.50	15.00	17.50	20.00	22.50	25.00	27.50
Tol.	±0.10						±0.15					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	34.40	36.90	39.40	41.90	44.40	46.90	49.40	51.90	54.40	56.90	59.40	61.90
B	30.00	32.50	35.00	37.50	40.00	42.50	45.00	47.50	50.00	52.50	55.00	57.50
Tol.	±0.20						±0.30					

SPECIFICATIONS

Current Rating: 4 Amps
 Voltage Rating: 150 VAC
 Withstanding: 1.3KV
 Operating Temperature: -40°C to +115°C
 Soldering Temperature: 250°±10°C for 5 seconds
 Contact Material: Copper with Tin Plating ①
 Insulator Material: Thermoplastic, UL 94V-0 ②
 Safety Rating: cULus

RPLJ-xx B A x A -FG

02: 2Pos
 03: 2Pos
 04: 2Pos
 24: 24Pos

J: Black(RAL9005)
 B: Red(RAL3001/D)
 C: Orange(RAL2011/P)
 D: Yellow(RAL1018/A)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)

FG: RoHS Compliant
 (Pb <40000ppm)

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX. ± X	.XX ± 0.10	AP APTOS TECHNOLOGY	
XX. ± X	.XXX ± X		
X. ± 0.50	X' ± 1'		
.X ± 0.30	.X' ± 1'		
REV. A	DRAWN	06/08/07	RPLJ Series
DATE 06/08/07	CHECKED		2.50mm Terminal Block Header - R/A
SCALE As Shown	APPROVED		PRODUCT NO. RPLJ- XX2AXA-FG
UNIT mm		SIZE A4	FILE NAME: RPLJ- XX2AXA-FG LF APD.DWG