

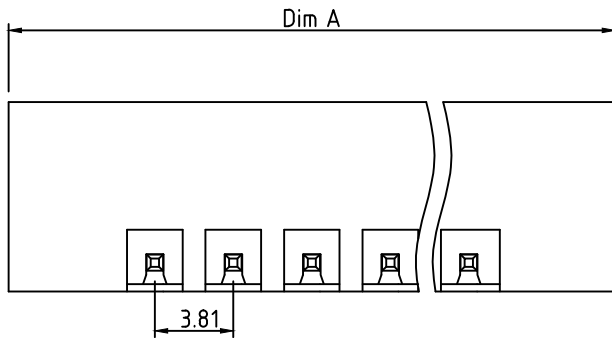
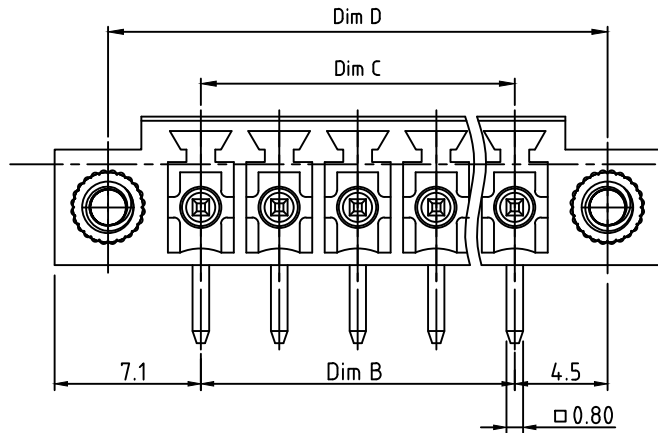


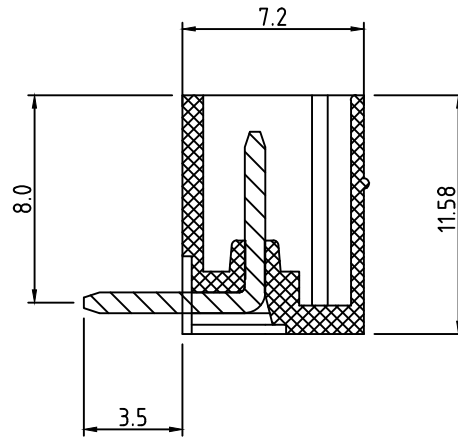

N= Number of contacts

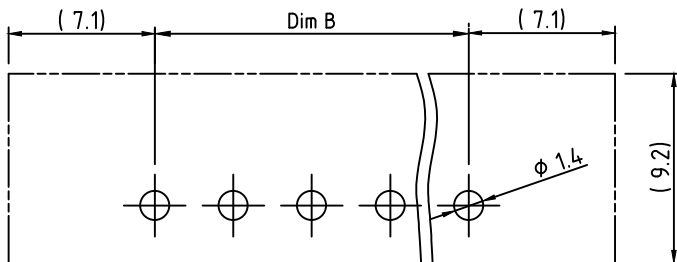

Dimensions	
A	(N-1)×3.81±14.2
B	(N-1)×3.81
C	(N-1)×3.81
D	(N-1)×3.81±9.0

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-16P	±0.25
16P-24P	±0.30

SPECIFICATIONS

Current Rating: 10/10.5 Amps
 Voltage Rating: 300V
 Dielectric withstanding: 1.6KV/2.5KV
 Operating Temperature: -40°C~+115°C
 Soldering Temperature: 250°C ±10°C /5Sec
 Solder Pin: Copper with Tin Plating
 Insulator Material: Thermoplastic, UL 94V-0
 Flange Nut: Brass, M2.5
 Safety Approval:

RPLJ- xx CE x A -FG

NO. OF POLES
 2 POLES
 3 POLES
 :
 :
 24 POLES

J: Black(RAL9005)
 B: Red(RAL3001/D)
 C: Orange(RAL2011/P)
 D: Yellow(RAL1018/A)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)
 I: White(RAL1102)

FG: RoHS Compliant
(Lead <4% in Copper Alloy)

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± 0.10
XX.	± X	.XXX	± X
X.	± 0.50	X'	± 1'
.X	± 0.30	.X'	± 1'
REV.	A	DRAWN	10/22/09
DATE	10/22/09	CHECKED	
SCALE	4:1	APPROVED	
UNIT	mm	SIZE	A4
		RPLJ Series	
		3.81mm Terminal Blk Hdr R/A w/Flange	
		PRODUCT NO. RPLJ-XXCEXA-FG	
		FILE NAME: RPLJ-XXCEXA-FG LF APD.DWG	