


Dimensions	
A	$(N-1) \times 3.81 \pm 14.2$
B	$(N-1) \times 3.81$

Poles	Tolerance
2P-6P	± 0.15
7P-12P	± 0.20
13P-16P	± 0.25
17P-24P	± 0.30

SPECIFICATIONS

Current Rating: 10/10.5 Amps
 Voltage Rating: 300V
 Dielectric withstanding: 1.6KV/2.5KV
 Operating Temperature: $-40^{\circ}\text{C} \sim +115^{\circ}\text{C}$
 Soldering Temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C} / 5\text{Sec}$
 Contact Material: Copper with Tin Plating
 Insulator Material: Thermoplastic, UL 94V-0
 Flange Nut: Brass, M2.5
 Safety Rating: cULus VDE

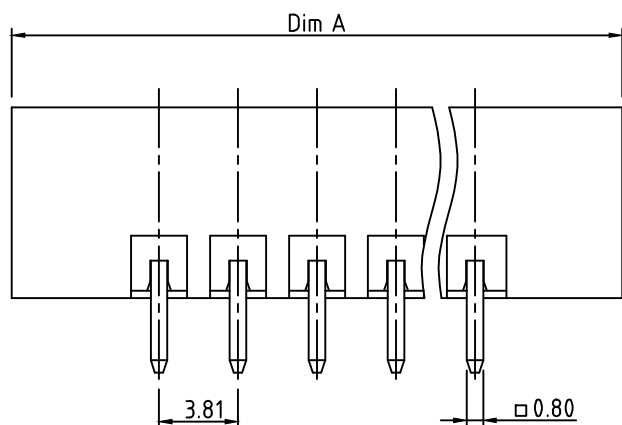

RPLJ- xx CE x J -FG



NO. OF POLES

2 POLES
 3 POLES
 :
 24 POLES

J: Black(RAL9005)
 B: Red(RAL3001/D)
 C: Orange(RAL2011/P)
 D: Yellow(RAL1018/A)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)

FG: RoHS Compliant
(Pb <40000ppm)

N= Number of contacts

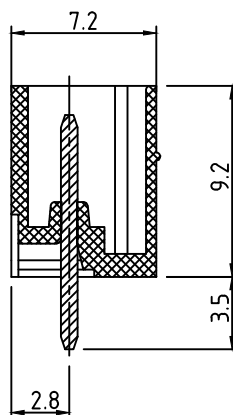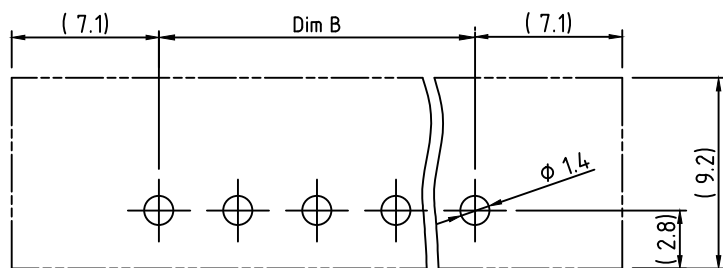

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. $\pm$ X	.XX $\pm$ 0.10
XX. $\pm$ X	.XXX $\pm$ X
X. $\pm$ 0.50	X.' $\pm$ 1'
.X $\pm$ 0.30	.X' $\pm$ 1'
REV. A	DRAWN
DATE 10/22/09	CHECKED
SCALE 4:1	APPROVED
UNIT mm	SIZE A4

AP APTOS TECHNOLOGY

RPLJ Series

3.81mm Terminal Blk Hdr w/Flange

PRODUCT NO. RPLJ-XXCEXJ-FG

FILE NAME: RPLJ-XXCEXJ-FG LF APD.DWG