
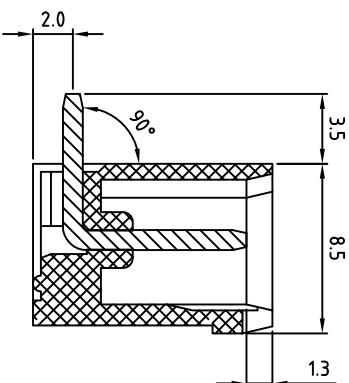


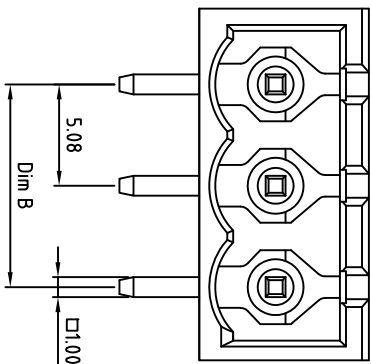

SPECIFICATIONS

Current Rating: 20 Amps
Voltage Rating: 300 VAC
Dielectric withstanding: 1.6KV/2.5KV
Operating Temperature: -40°C to +115°C
Soldering Temperature: 250°C±10°C for 5 Seconds
Contact Material: Copper with Tin Plating
Insulator Material: Thermoplastic UL 94V-0
Safety Approval:  


RPLJ-XXEDXA-FG

FG: RoHS Compliant
Pb<40000ppm

02:	2Pos
03:	2Pos
04:	2Pos
24:	24Pos

J:	Black(RAL9005)
B:	Red(RAL3001/D)
C:	Orange(RAL2011/P)
D:	Yellow(RAL1018/A)
E:	Green(RAL6018/T)
F:	Blue(RAL5015/A)
H:	Grey(RAL7035/D)

N = Number of contacts

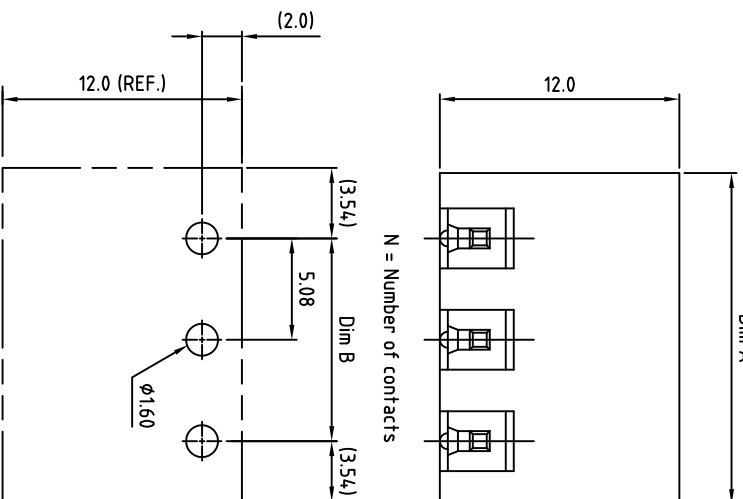

Dimensions

A	(N×5.08)+2.0
B	(N-1)×5.08

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.25
13P-18P	±0.30
19P-24P	±0.40

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX	± X	.XX	± 0.10
XX	± X	.XX	± X
X	± 0.50	X	± 1
X	± 0.30	X	± 1

APRIL 2009
TECHNOLOGY

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

REV.	A	DATE	10/27/09	FILE NAME	RPLJ Series
SCALE	4:1	CHECKED	APPROVED	PRODUCT NO.	RPLJ-XXEDXA-FG
UNIT	mm			SIZE	A4