

SPECIFICATIONS

Current Rating: 20/15 Amps
 Voltage Rating: 300V/750V
 Dielectric withstanding: 1.6KV/6KV
 Operating Temperature: $-40^{\circ}\text{C} \sim +115^{\circ}\text{C}$
 Max Processing Temp: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$ for 5 seconds
 Contact Material: Copper with Tin Plating
 Insulator Material: Thermoplastic, UL 94V-0
 Safety Approval: 

RPLJ- xx J A x J-FG

No. OF POLES

02: 2 POLES

:

16: 16 POLES

J: Black(RAL9005)
 B: Red(RAL3001/D)
 C: Orange(RAL2011/P)
 D: Yellow(RAL1018/A)
 E: Green(RAL6018/T)
 F: Blue(RAL5015/A)
 H: Grey(RAL7035/D)
 I: White(RAL1102)

APTOS Technology CONFIDENTIAL

This document, and all information it contains, are
 the confidential, proprietary property of APTOS
 Technology. Disclosure, duplication or distribution of this
 document, or any information it contains, in whole or
 part, without prior written permission from APTOS
 Technology is strictly prohibited

Dimensions





A	Nx7.62
B	(N-1)x7.62

Poles	Tolerance
2P-6P	± 0.20
7P-12P	± 0.30
13P-16P	± 0.40

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	$\pm$	X	.XX $\pm$ 0.10
XX.	$\pm$	X	.XXX $\pm$ X
X.	$\pm$	0.50	X." $\pm$ 1"
.X	$\pm$	0.30	.X" $\pm$ 1"
REV.	A		DRAWN
DATE	10/27/09		CHECKED
SCALE	1:1		APPROVED
UNIT	mm		SIZE A4

AP APTOS TECHNOLOGY

10/27/09
 RPLJ Series
 7.62mm Term. Blk. Hdr. w/Flange
 PRODUCT NO. RPLJ- XXJAXJ-FG
 FILE NAME: RPLJ- XXJAXJ-FG LF APD.DWG

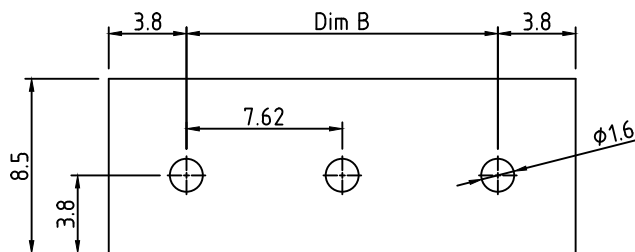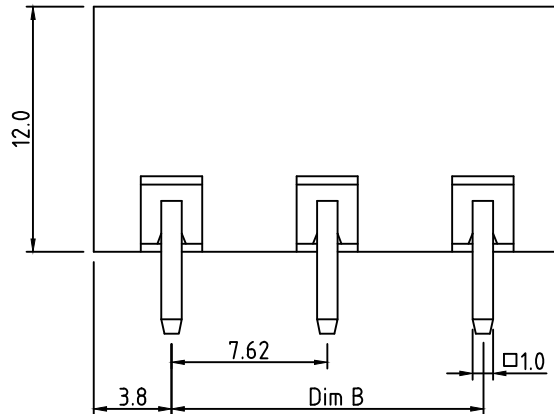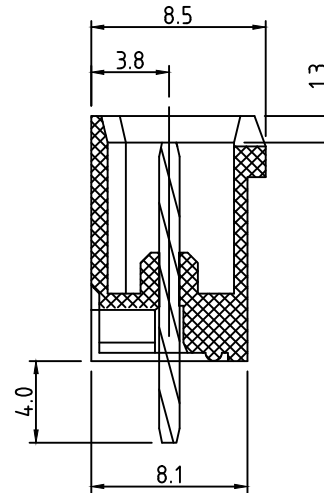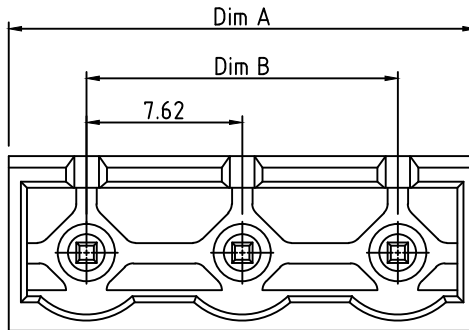

PCB. LAYOUT