






SPECIFICATIONS

Current Rating: 20 Amps/15 Amps
Voltage Rating: 300V/750V
Dielectric withstanding: 1.6KV/6KV
Operating Temperature: -40°C~+115°C
Max Processing Temp: 250°C±10°C for 5 seconds
Contact Material: Copper with Tin Plating
Flange Screw Nut: Brass M2.5
Insulator Material: Thermoplastic, UL 94V-0
Safety Approval:  

RPLJ-xx J E x J-FG

No. OF POLES ——— FG: RoHS Compliant
02: 2 POLES Pb<4000ppm

J: Black(RAL9005)
B: Red(RAL3001/D)
C: Orange(RAL2011/P)
D: Yellow(RAL1018/A)
E: Green(RAL6018/T)
F: Blue(RAL5015/A)
H: Grey(RAL7035/D)

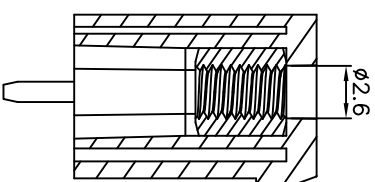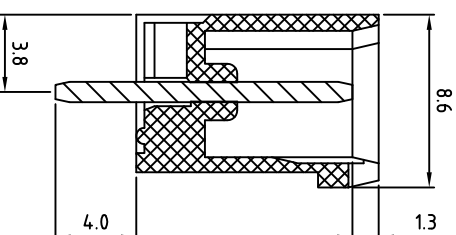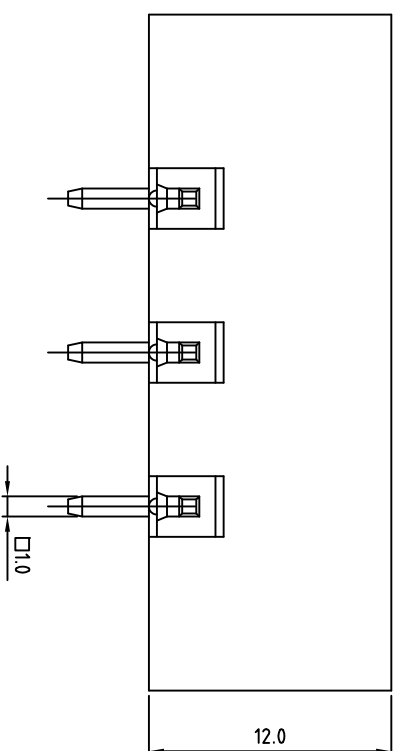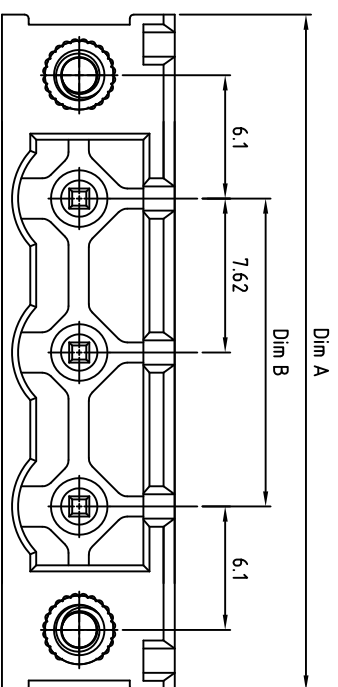


Dimensions

A	(N-1)×7.62+2.96
B	(N-1)×7.62

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-16P	±0.30

P.C.B Layout

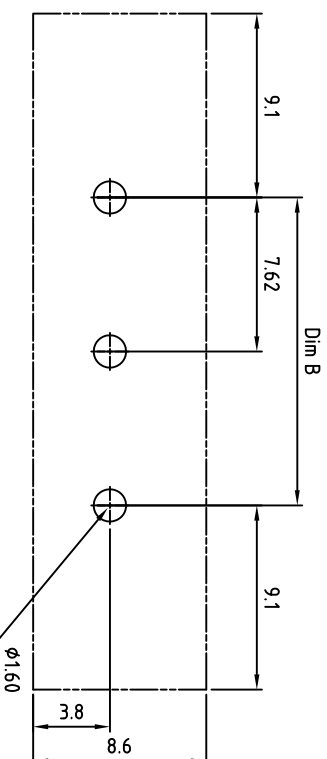

APTOS Technology CONFIDENTIAL
This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

APTOS TECHNOLOGY

RPLJ Series

7.62mm Terminal Blk Hdr w/Flange

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX. ± X	.XX ± 0.10	DATE	10/27/09
XX. ± X	.XXX ± X	REV.	A
X. ± 0.50	X. ± 1°	SCALE	1:1
X. ± 0.30	X. ± 1°	APPROVED	
UNIT	mm	SIZE	A4
		FILE NAME	RPLJ-XXJEXJ-FG LF APD.DWG