

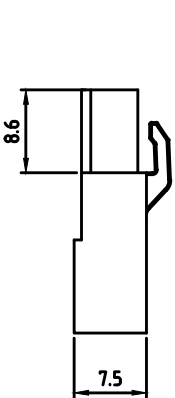



SPECIFICATIONS

Current Rating: 10 Amps
 Voltage Rating: 300V
 Dielectric withstanding: 1.6KV
 Wire Range: 0.5–1.0mm²/1.5–2.5mm²
 Insulator Material: Thermoplastic, UL 94V–0



RPPR xxEJXJ-FG

- No. OF POLES
- 02 2 CONTACTS
 - 03 3 CONTACTS
 -
 - 24 24 CONTACTS
- Color
- J Black (RAL9005)
 - B Red (RAL3001/D)
 - C Orange(RAL2011/P)
 - D Yellow(RAL1018/A)
 - E Green(RAL6018/T)
 - F Blue (RAL5015/A)
 - H Grey(RAL7035/D)
- FG: Pb=40000ppm

Dimensions	
A	N×5.08
B	(N-1)×5.08

Poles	Tolerance A	Tolerance B
2P-6P	±0.20	±0.20
7P-12P	±0.25	±0.25
13P-16P	±0.30	±0.30
16P-24P	±0.40	±0.35

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± 0.10
XX.	± X	.XXX	± X
X.	± 0.50	X.	± 1"
.X	± 0.30	.X	± 1"



REV. A	DRAWN	10/22/09
DATE 11/22/09	CHECKED	
SCALE 4:1	APPROVED	
UNIT mm		

RPPR	
5.08 Terminal Block w/o Flange	
PRODUCT NO.	RPPR-XXEJXJ-FG 5.08 LF APD
FILE NAME:	RPPR-XXEJXJ-FG 5.08 LF APD.dwg

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited