
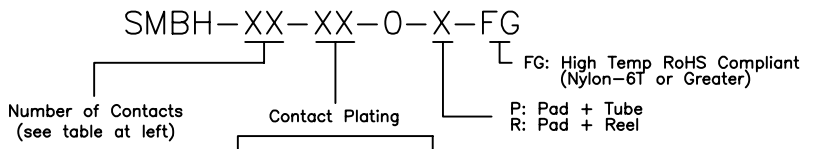
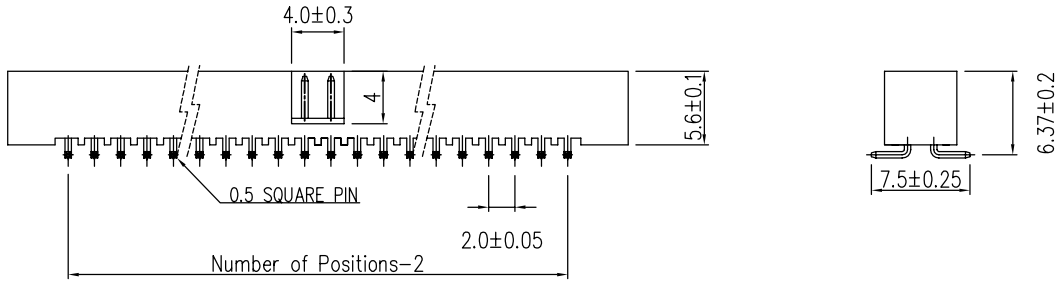



1 2 3 4 5 6 7 8 9 10

SPECIFICATIONS

Current Rating: 2 Amps
 Voltage Rating: 100V AC/DC
 Insulator Resistance: 1000 Megohms min.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°C~+105°C
 Contact Resistance: 20 m ohms max
 Max Processing Temp: 260°C for 10 Sec
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color: Black
 Standard: Nylon-9T
 Finish: Gold Flash all over

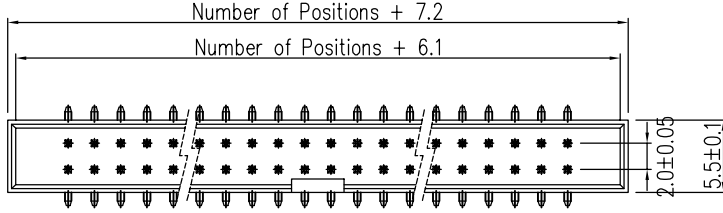

Definition	Code
⊙ Tin plated:	VA
⊙ Gold plated:	
Gold Flash	VB
3 μ" Gold	VC
5 μ" Gold	VD
10 μ" Gold	VE
30 μ" Gold	VJ



P.C.B LAYOUT

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
XXX. ± X	.XX ± 0.15
XX. ± X	.XXX ± X
X. ± 0.30	.X' ± 5'
.X ± 0.20	.X' ± 3'

REV. A	DRAWN	09/14/10
DATE 09/14/10	CHECKED	
SCALE 4:1	APPROVED	
UNIT mm		SIZE A4



SMBH Series
 2.0mm SMT Box Header
 PRODUCT NO. SMBH-XX-XX-0-X-FG
 FILE NAME: SMBH APD.DWG

1 2 3 4 5 6 7 8 9 10