


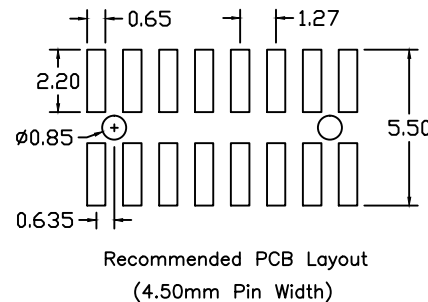
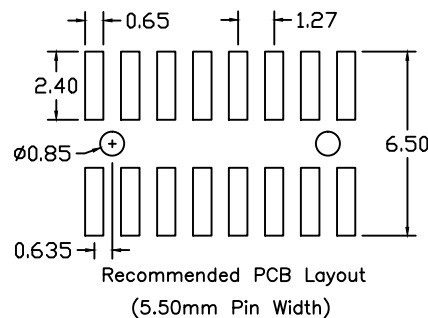
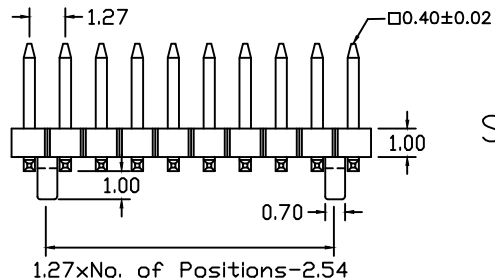
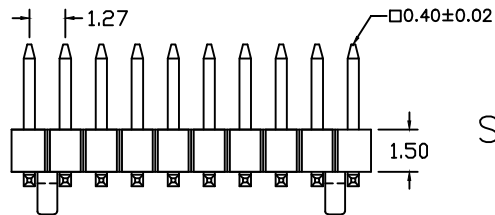
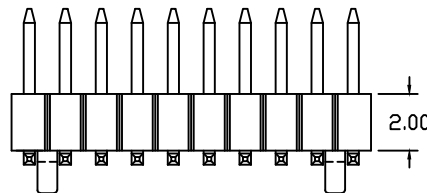


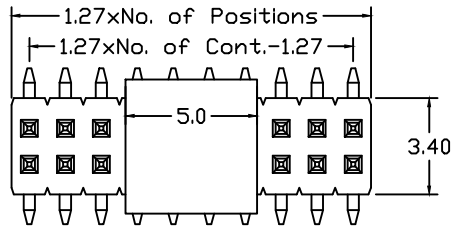


S3



S2



S1



SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric withstanding: AC 300V
 Operating Temperature: -40°C~+105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Nylon-6T or LCP
 Finish: Gold Plated
 ◎Standard: Gold Flash all over
 Color: Black

SPNZ-XXSX-XX-030/055-X-X-FG

Number of Contacts: []
 Connector Type: []
 Contact Plating: []
 Pin Length/Pin Width: []
 High temp RoHS Compliant (Nylon-6T or Greater)
 P: Cap
 T: Tape+Reel
 PT: Cap+T&R
 0: W/O Locating Peg
 1: With Locating Peg

Definition	Code
Height:	
1.5mm	S1
2.0mm	S2
2.5mm	S3

Definition	Code
◎ Gold plated:	
flash VB 10μ" VE	
3μ" VC 15μ" VF	
5μ" VD 30μ" VJ	
◎Standard: VB	

Pin Length/Pin Width
 030=3.00mm/055=5.50mm
 030=3.00mm/045=4.50mm
 (other pin lengths avail)

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	±	X	.XX ± 0.15
XX.	±	X	.XXX ± 0.10
X.	±	0.30	X.' ± 5'
.X	±	0.25	.X' ± 3'
REV.	A	DRAWN	11/10/10
DATE	11/10/10	CHECKED	
SCALE	4:1	APPROVED	
UNIT	mm		

APTOS TECHNOLOGY

SPNZ Series
 1.27 mm SMT Dual Row Pin Header
 PRODUCT NO. SPNZ-XXSX-XX-A/W-X-X-FG
 FILE NAME: SPNZ SX LF APD.DWG