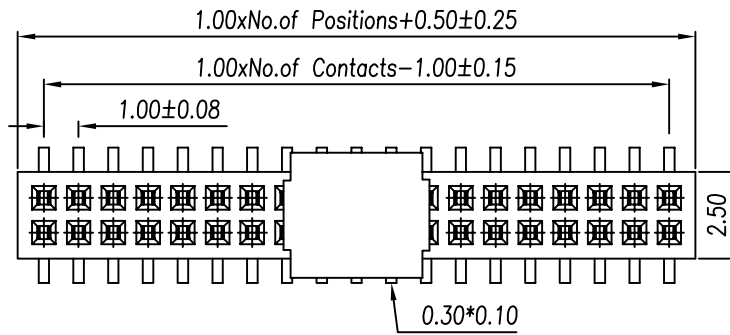
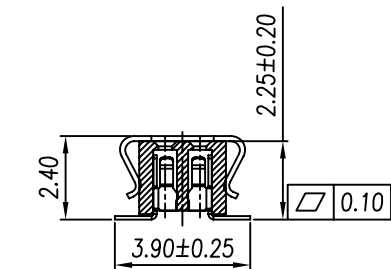
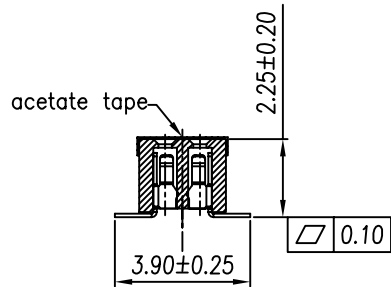


RECOMMENDED P.C.BOARD LAYOUT

SPECIFICATIONS

Current Rating: 0.5 Amps
 Insulator Resistance: 500 Megohms min.
 Contact Resistance: 40 m ohms max.
 Dielectric withstanding: AC 200V
 Operating Temperature: -40°C~+105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 ◎Standard: L.C.P.
 Finish: Gold Plating
 ◎Standard: Gold Flash all over

SPUFZ-XXS3-XX-0-X-FG

Number of Contacts | FG: High Temp RoHS Compliant

Contact Plating

Definition	Code
◎ Tin plated:	VA
◎ Gold plated:	
flash VB 15μ"	VF
10μ" VE 30μ"	VJ
◎Standard: VB	

Packaging Options
 Blank: Tube w/o Cap
 P: Cap & Tube
 T: Tape+Reel
 PT: Cap+Tape Reel
 C: Acetate Tape
 TC: Acetate Tape+Tape Reel

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			
XXX.	± X	.XX	± 0.15
XX.	± X	.XXX	± 0.10
X.	± 0.30	X'	± 5'
.X	± 0.25	.X'	± 3'
REV.	A	DRAWN	12/12/08
DATE	12/12/08	CHECKED	
SCALE	1:1	APPROVED	
UNIT	mm	SIZE	A4

APTOS TECHNOLOGY

SPUFZ Series
 1.00 mm SMT Socket

PRODUCT NO. SPUFZ-XXS3-X-X-X-*

FILE NAME: SPUFZ S3 LF APD.DWG