





SPECIFICATIONS

Voltage Rating: 300VAC
 Current Rating: 10 Amps
 Dielectric withstanding: 1.6KV
 Operating Temperature: -40°C to +115°C
 Soldering Temperature: 250°C±10°C/5 Sec
 Wire Guard: Brass, Tin Plated
 Terminal Screw: Steel Zinc plating "-" slot type
 Insulator Material: Thermoplastic, UL 94V-0
 Wire Range:
 Wire Strip Length: 6-7mm
 Solid/Stranded Wire: 12-24 AWG
 Torque: 3.5Lb-In
 Screw: M2.5
 Clamp: Brass, Ni Plated



N=Number of contacts(Only 1 level)

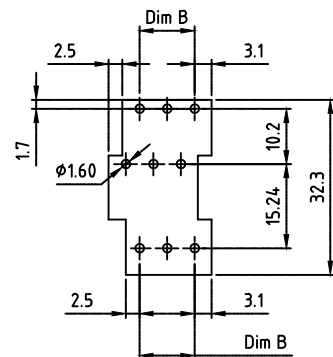

P.C.B. LAYOUT

Dimensions

A	N×5.08
B	(N-1)×5.08

Poles	Dim A	Dim B
2P-6P	±0.15	±0.10
7P-12P	±0.20	±0.20
13P-18P	±0.30	±0.25
19P-24P	±0.40	±0.30

APTOS Technology CONFIDENTIAL
 This document, and all information it contains, are the confidential, proprietary property of APTOS Technology. Disclosure, duplication or distribution of this document, or any information it contains, in whole or part, without prior written permission from APTOS Technology is strictly prohibited

TBBM-xx BAXJ-FG

FG: RoHS Compliant
Pb<40000ppm

06 2x3 CONTACTS
 09 3x3 CONTACTS

 72 3x24 CONTACTS

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX. ± X	.XX ± 0.10
XX. ± X	.XXX ± X
X. ± 0.50	X' ± 1'
.X ± 0.30	.X' ± 1'

APTOS TECHNOLOGY

REV. C	DRAWN	06/30/05
DATE 06/29/2017	CHECKED	
SCALE As shown	APPROVED	
UNIT mm		SIZE A4

TBBM Series	
5.08 mm Terminal Block - Triple Level	
PRODUCT NO.	TBBM-XXBAXJ-FG
FILE NAME	TBBM-XXBAXJ-FG LF APD.DWG